

# INSTALLATION INSTRUCTIONS

Model # 8692-PL/8692-1-PL

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Use the backplate (C) as a template to mark the location of the anchors. Pre-drill the holes for the anchors (E) and insert the anchors.
4. Thread the four studs (B) into the pre-drilled holes in the long strap (C) spaced the same distance apart as the holes in the back plate (F).
5. Attach long Strap (C) using outlet box screws (D) to the outlet box (A), screw the wood screws (G) into the anchor (E) (Fig 1).

## CONNECTION THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw (H) provided.

## FINISHING THE INSTALLATION (Fig.1)

7. To prevent moisture from entering the outlet box (A) and causing a short, use clear silicone sealant to outline the outside of fixture back plate (F) where it meets the wall leaving a space at bottom to allow moisture a means to escape.
8. Align back plate (F) onto studs (B) and with cap nuts (I). (Fig 1)
9. At this point, unscrew the screws (J), carefully remove cage (K) to install the light bulbs in accordance with the fixture specification (1\*26W).
10. The ballast in each of these models can be replaced by a qualified electrician without cutting of wires and without damage to the housing, trim, decorative elements or carpentry to which the fixture is attached. See Fig.3 for more detail.
11. Replace the cage (K), secure with the screws (J).
12. This fixture is ETL Listed for Wet Location applications.
13. Contains Mercury (HG) Dispose of according to Local, State and Federal Law. ([www.epa.gov/bulbrecycling](http://www.epa.gov/bulbrecycling)).

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig. 1

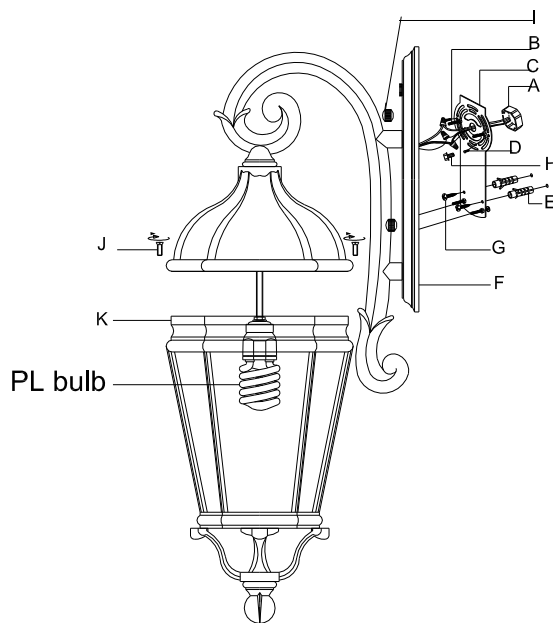


Fig.2


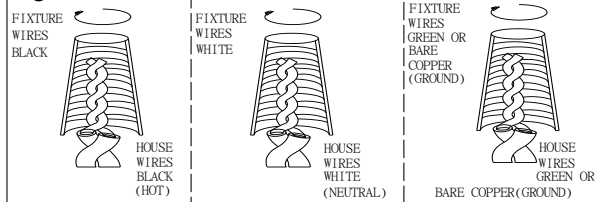


Fig.3

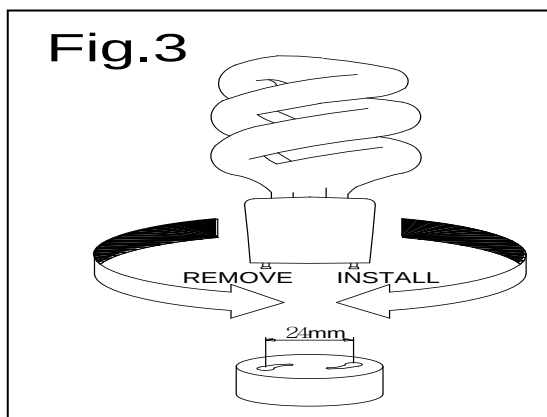

**“CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”**

**ATTENTION – RISQUE D'INCENDIE, CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.**

U.S. Patents: D457,681; D461,591; D463, 062

This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.