

INSTALLATION INSTRUCTION FOR FIXTURE #10256-732

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.


MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from ceiling. Including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Thread nipple (K) onto the coupling (N), cap (G), rubber washer (H), glass shade (I) and rubber washer (H) over the nipple (K) in order and secure with column (L); adjust the glass shade to horizontal.
4. Put the rubber washer (H), glass shade (M), rubber washer (H) and steel washer (O) over the nipple (K) in order and secure with hex nut (P).
5. Put the cap (Q) onto the nipple (K) and secure with nut (R), then lock the finial (S) onto the nut (R).
6. Insert the arm (T) onto the top & bottom assembly (V) and secure with screw (U) using screwdriver (J) provided.
7. Assemble the needed rod (D) & (E) together, then assemble the bottom end of rod (E) onto coupling (F), Thread the canopy (B) onto the top end of rod (D).
8. Install (3) three candelabra base bulbs (Y) up to 60 watts or CFL or LED equivalent (Not included) in accordance with fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
9. Attach mounting plate (A) to outlet box (Not included) using outlet box screws (X). The side of mounting plate marked "GND" must face out.
10. The support cable is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (A) and attach hook on the end of support cable (W) into a slot located on mounting plate (A). Carefully allow the support cable (W) to support the weight of the fixture while wiring.

Fig.1

A-020


Mounting Plate * 1
 Outlet box Screw * 2
 Ground Screw * 1

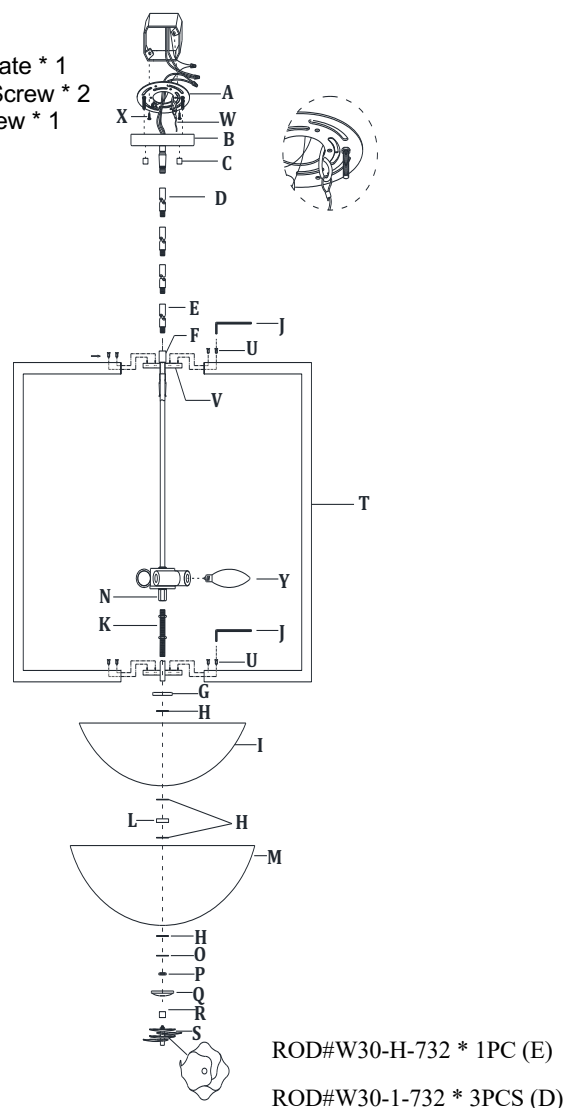

CONNECTING THE WIRES (FIG. 2)

11. Connect the electrical wires as shown in Fig.2 making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate using green screw provided.
12. Tuck wire connections neatly into outlet box.
13. Attach canopy (B) over mounting plate (A) and secure with nut (C) tightly.

Fig.2

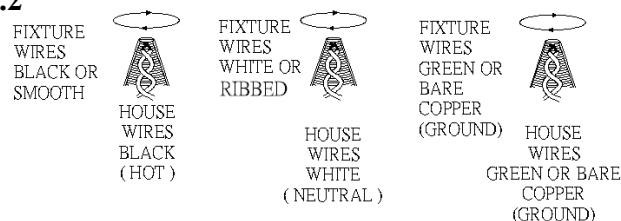

Your installation is now complete. Return power to the outlet box and test the fixture.



Note: Illustration (Fig. 1) & (Fig.2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.