

INSTALLATION INSTRUCTIONS FOR 10416-860-L FOR LED PENDANT

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Put the driver into the junction box (not included). (Note: To be installed with a 4" round or octagon junction box).
4. Connect the white input wire from the driver to the white wire from the junction box. Connect the black input wire from driver to the black wire from the junction box. (Fig. 3)
5. Attach the mounting plate (A) to the junction box (not included) using the mounting screws (C) (Size: 8-32*1/2"L). The side of the mounting plate (A) marked "GND" must face out.
6. Fixture includes three 12" and one 6" rods. Secure the nipple (G) to the rod (F2) tightly. Determine desired hanging height and thread rods (F1/F2). If installing with one 6" rod only the all thread must be removed. Then feed fixture wire carefully through each rod.
7. Secure the rods to the swivel of the canopy (D).

CONNECTING THE WIRES (Fig.2)

8. The red and black input wires from the led module are marked LED+ & LED-. Connect the red output wire (marked output+) from the driver to the red wire (marked LED+) from the LED module and the black one (marked output-) to the black wire (marked LED-) from the LED module. See Fig. 2, make sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (A) using the green screw (B) provided.

COMPLETING THE INSTALLATION

9. Align the canopy (D) onto the mounting plate (A) and secure with screws (E).
10. Rotate the glass (H) to the fixture (I). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LED. Hold the fixture by the base or fixture body only.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Fig.1


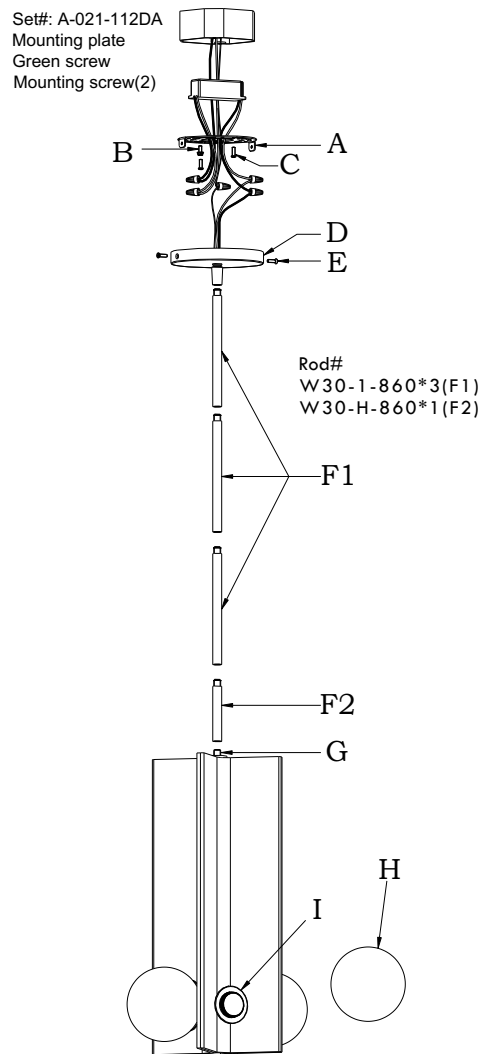


Fig.2

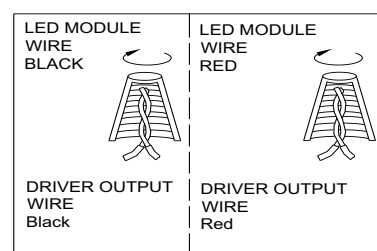

Dimmable with ELV and/or LED compatible wall dimmer switches.

The fixture is over 10 lbs. Please remove all glasses before removing canopy from mounting plate to inspect wire connections in the future. This will allow you to hold the fixture body during wire connection or inspection or fixture removal.

Fig.3

