

# INSTALLATION INSTRUCTIONS FOR P986-077-L

For LED Pendant

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR.**

## PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary remove the old fixture and mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

## ASSEMBLING THE FIXTURE (Fig.1)

3. This fixture includes three 12" and one 6" rod. Determine the desired hanging and connect rods (H), (J), (K), (L), with nipples (I). Attach the rod assembly to nipple (M) on fixture body. Attach the rod assembly to the swivel (G) on canopy (E)
4. Remove LED driver (D) from canopy (E). Connect red wire from driver to red wire from fixture body. Connect black wire from driver to the black wire from fixture body and secure all wires with wire nuts (See Fig. 1-1). Secure LED driver (D) to canopy (E) with screw (C).
5. Attach mounting strap (A) to the junction box with two junction box screws (B) (Size: 8-32\*1/2"L).

## CONNECTION THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig.2, making sure that all wire nuts are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground Wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided. Tuck the wire connections neatly into the junction box.

## FINISHING THE INSTALLATION (Fig. 1)

7. Align canopy (E) to mounting strap (A) and secure with screws (F).
8. Hang the crystal strands (P) through the loops on metal pan (O). (Note: A total of 156 crystal strands are included).
9. Align cage (R) to metal pan (O) and secure with screws (N) to bracket (Q) on the cage (R).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1


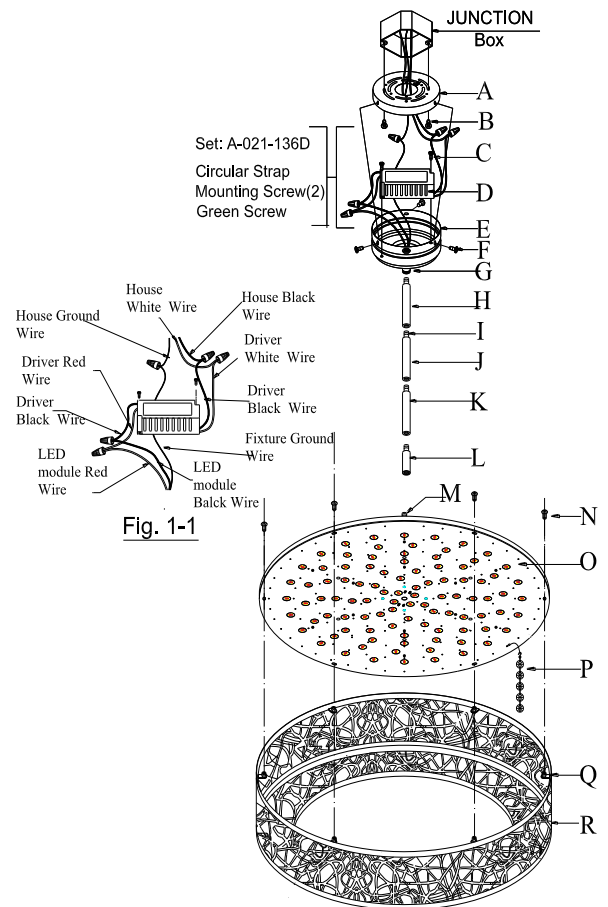


Fig. 2

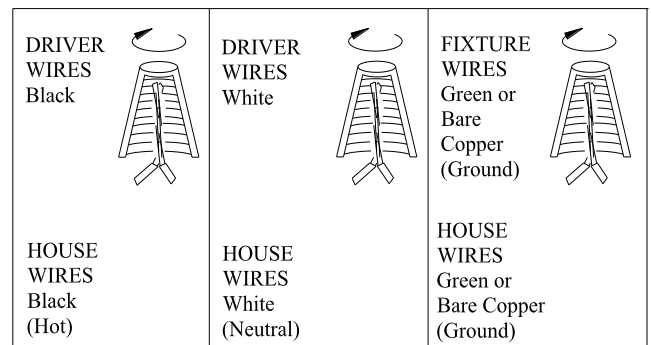

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation. Dimmable with C-L (CFL & LED) type and Incandescent/Halogen type dimmers




Fig. 3

**Replacing LED module (Fig.3)**

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 3.)

**Warning: Turn off power at the circuit breaker before replacing LED module or LED driver.**

- Loosen screw (N) on the metal pan (O) and remove the cage (R) and all of the crystal strands (P).
- Loosen screw (T) and hex nut (D') to remove metal panel (C').
- Unscrew hex nut (B') and gasket (A') and disconnect the led module by unplug the wire connector (X) and (Y).
- Carefully remove LED module (Z).
- Reverse steps a-d for installing the new LED module
- Note: The LED module should be provided by a specified supplier.
- For better heat dissipation the LED module should be applied with thermal grease when re-lamping.

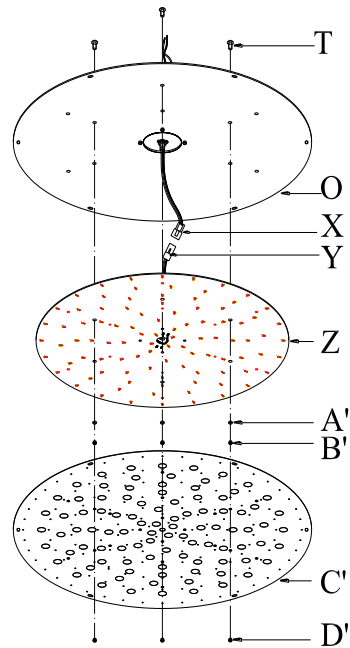

Brand: Lutron

Ordering Information

■ Boxed

● Clamshell

Model number	Product name	Control type	Maximum capacity
■ DVCL-153P-	Diva C-L	Single-pole/3-way dimmer-	150 W CFL/LED or 600 W Incandescent/ Halogen 120 V
● DVCL-153PH-			
■ DVSCCL-153P-	Diva C-L Satin Colors		
■ CTCL-153P-	Skylark Contour C-L		
● CTCL-153PH-			
■ AYCL-153P-	Ariadni C-L		
● AYCL153PH-			
● TTCL-100H-	Credenza C-L	Single-pole lamp dimmer	100W CFL/LED or 250W Incandescent/ Halogen 120v