

INSTALLATION INSTRUCTIONS

Item#1084-613/695-L (New. 2020/3/18)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE WITH CHAIN LOOP (Fig. 1)

3. Secure metal tube (O) onto the nipple (U) of fixture body.
4. Determine the desired hanging height and thread rods (F1, F2 and F3) to the nipple of the metal tube (O). Then attach loop (H1) by screwing in to rod (F1). Note: Pass the wires carefully through each rod as you assemble.

HANGING THE FIXTURE (Fig. 3)

NOTE: For a safe and secure installation, these fixtures must be installed by means of support that is independent of the outlet box.

(Note – For heavy fixtures hickey and cable lock are provided, other required hardware to be supplied by installer)

SUGGESTED INSTALLATION:

5. Provide a 1/4 IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet box as shown.
6. Assemble the ceiling loop, nipple, nuts and hickey to center 1/4 IPS support pipe and adjust overall length to allow the ring to hold the canopy flush to the ceiling. When the adjustments have been completed, secure the three nuts, as shown.
7. Open the quick link, attach the quick link to fixture loop, slip the lock collar and canopy over the quick link, then attach the quick link to ceiling loop, close the quick link.
8. Lace the fixture wires, ground and safety cable through the chain and loop, exiting through the side of hickey. Run cable through the top of the outlet box and secure to strain relief bushing.

CONNECTING THE WIRES (Fig. 2)

9. At this point, connect the electrical wire as shown in (Fig.2), making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the outlet box. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling.
10. Raise the lock collar and thread onto ceiling loop protruding through canopy.

COMPLETING THE INSTALLATION (Fig. 1)

11. Thread the center tube (I) to coupling (V) and tighten with hex nut (L).
12. Trough diffuser glass (J) into the center tube (I) and secure by using the finial (K).

Replacing LED module (Fig. 4)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 4.)

- a. Shut off the power.
- b. Loosen the finial (K) and remove the diffuser glass (J).
- c. Loosen the screws (S) and remove the bushing (T) and the glass shield (R).
- d. Press the button of the printed "L" quick connector on LED module (P) with screw driver (not included) to disconnect the black wire, and then disconnect the white wire from the printed "N" quick connector on LED module (P).
- e. Remove screws (Q). Carefully remove the LED module (P).
- f. Reverse steps b-e for installing the new LED module.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation

Fig. 1

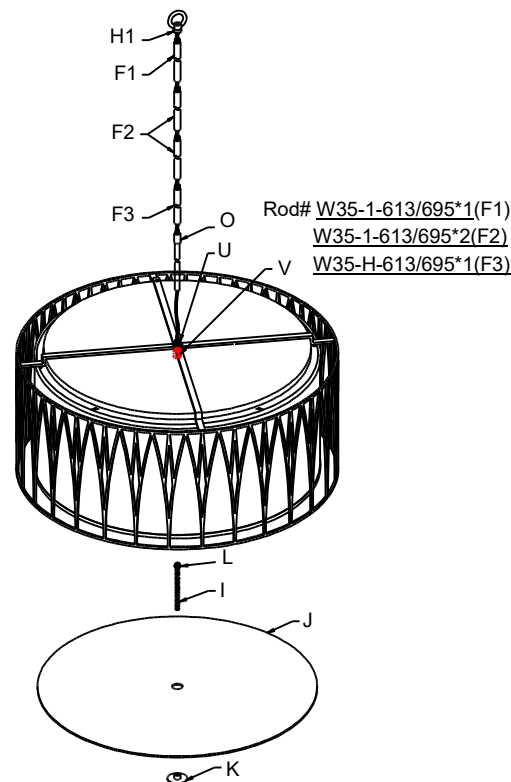


Fig. 2

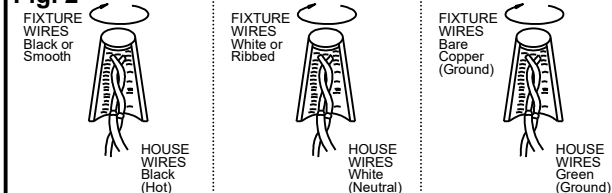


Fig. 3

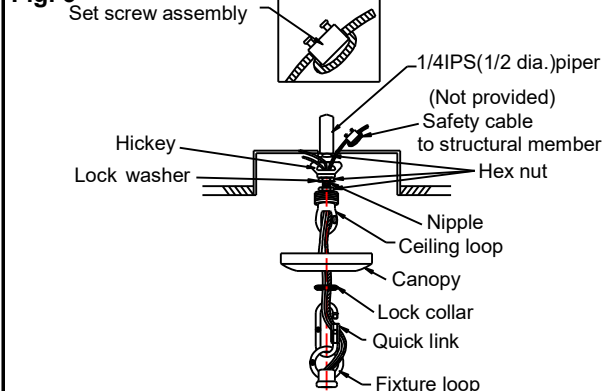


Fig.4

