

INSTALLATION INSTRUCTIONS

Item# 13125-732 13125-84 13125-899

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.

2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig.1)

3. Loosen lock nut (F) to remove from mounting screw (B). Thread two mounting screws (B) into the mounting plate (A) spaced the same distance apart as the holes in the canopy (E). (You can adjust the length of the screws by using hex screws (D) if necessary.)

4. Attach mounting plate (A) to junction box (not included) using junction box screw (C). The side of mounting plate (A) marked "GND" must face out.

5. Determine desired hanging height and thread rods (H/G) on fixture body (I). Pass wires carefully through each rod as you assemble.

6. Push fixture wires carefully through the swivel on canopy (E) and secure canopy (E) onto rods (G/H).

CONNECTING THE WIRES (Fig. 2)

7. Connect electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the ground wire directly to the mounting plate (A) using the green screw provided.

8. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

9. Placing the canopy (E) to the ceiling by aligning the protruding mounting screw (B) all the way through the mounting plate (A) and tighten the canopy (E) using two lock nuts (F).

10. Screw glass shade (J) over the socket in the fixture body (I) by using socket ring (K). Do not over tighten.

11. Install (1) one medium base bulb (L) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig.1

Set#A-020

-Mounting plate

-Ground Screw

-Junction Box Screw*2

Rod#

W32-H-732/84/899(G-6")

W32-1-732 /84/899X 3 (H-12")

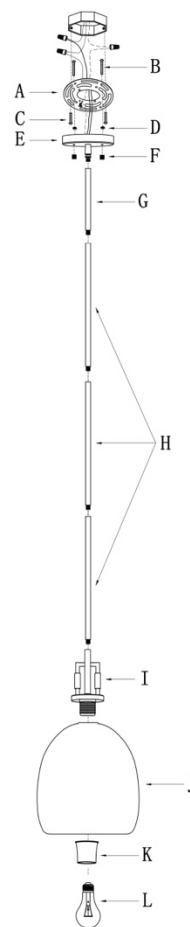


Fig. 2



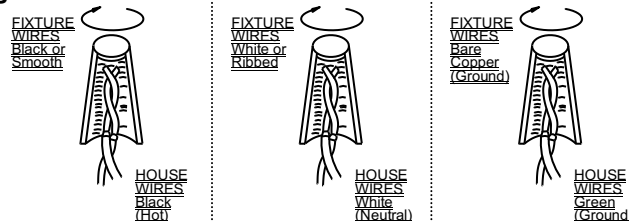


Fig.3

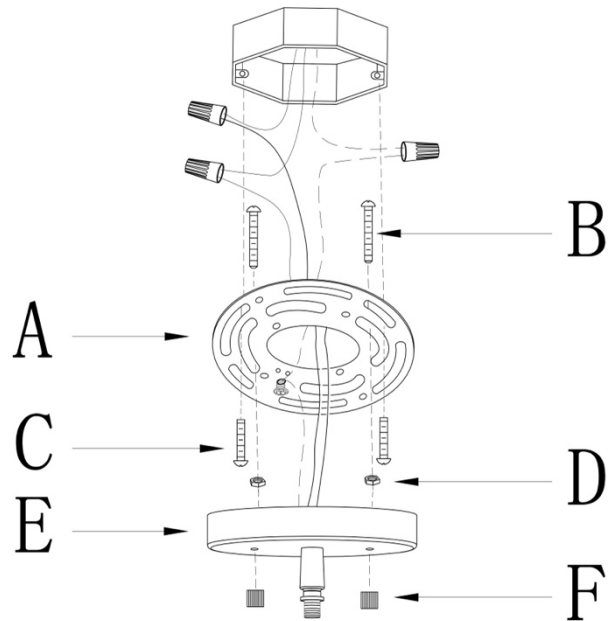

a. Hardware Bag:

- A. Mounting plate*1
- B. Mounting screw*2
- C. Junction Box Screw*2
- D. Hex screw*2
- E. Canopy*1
- F. Lock nut*2

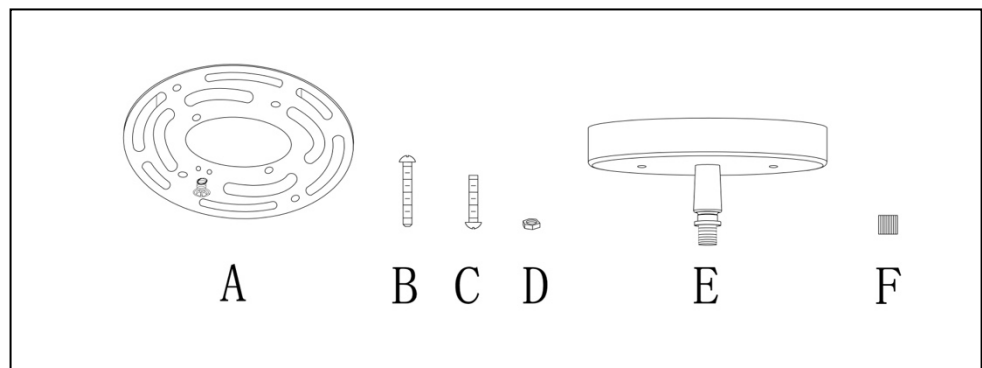

b. Hardware Bag:

- H. ROD 12"*3
- G. ROD 6"*1

