

INSTALLATION INSTRUCTION

Item# 12105-855

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPATION

1. Shut off the power at the fuse box or circuit breaker box. If necessary, remove the old fixture and all mounting hardware from junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig.1)

3. Carefully place rods (P) through holes on top of rod assembly (T). Then secure with screws (S), Do not over tighten.
4. Slip the holes of cross tube (N) over all thread (O), and secure with couplings (M). Then tighten the screws (S).
5. Determine desired hanging height and thread rods (I, L) to couplings (M). Pass wires carefully through each rod.
6. Thread swivels (H) into rod (I)
7. Insert all thread of swivels (H) into the holes on canopy (G). Then place metal washers (D) and lock washers (C) over all thread and secure with hex nuts (B).

MOUNTING THE FIXTURE (Fig.1)

8. Secure circular strap (A) to junction box with junction box screws (E) (Size: #8-32*0.6"L), Make sure the side of circular strap marked "GND" must face out

CONNECTING THE WIRES (Fig.2)

9. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect ground wires to it. Otherwise, connect ground wire directly to the circular strap (A) and secure using green screw provided.
10. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

11. Raise the canopy (G) to the circular strap (A), and then secure with the mounting screws (F) (Size: #8-32*0.5"L).
12. Install the fabric shade (Q) onto the candle sleeve (R).
13. Install (5) five candelabra base bulbs up to 60 watts each or CFL or LED equivalent (Not included) in accordance with the fixture specification. **(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

Set# A-020-120DC

- Circular strap
- Ground screw
- Mounting screws*2
- Junction box screws*2

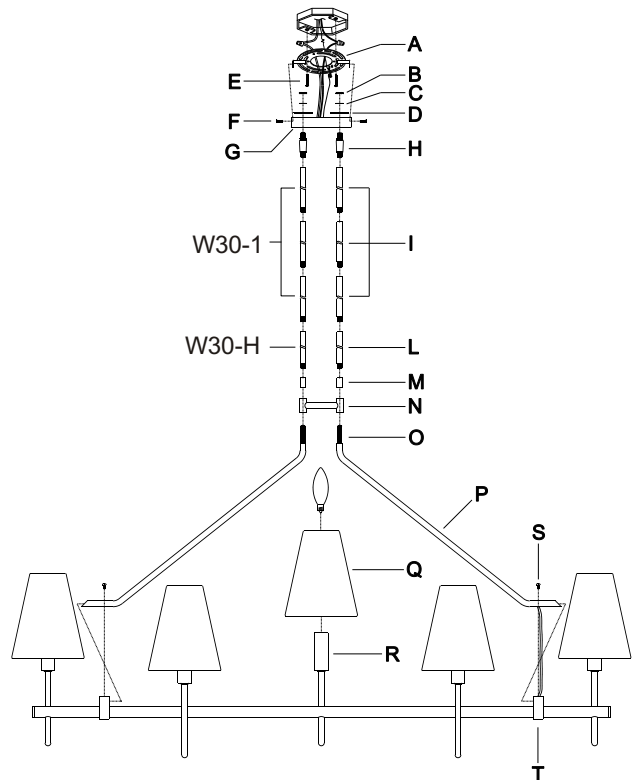


Fig.2

