

INSTALLATION INSTRUCTION

Item# 12108-855

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPATION

1. Shut off the power at the fuse box or circuit breaker box. If necessary, remove the old fixture and all mounting hardware from junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig.1)

3. Insert all thread (M) into the holes on main body (H). Then place metal washers (N, O) over all thread and secure with hex nuts (P).
4. Thread finials (S) onto all thread (T).
5. Slip the hole of cup (K) over all thread (L), and secure with coupling (J).
6. Determine desired hanging height and thread rods (F, I) to couplings (J). Then thread the swivel (E) of canopy (D) onto rod (F). Pass wires carefully through each rod, swivel (E) and canopy (D).

MOUNTING THE FIXTURE (Fig.1)

7. Secure circular strap (A) to junction box with junction box screws (B) (Size: #8-32*0.6"L). Make sure the side of circular strap marked "GND" must face out
8. The support cable is provided to support the weight of the fixture while wiring. Attach the hook (G) on the end of the support cable to the crossbar (A). Carefully allow the support cable to support the weight of the fixture while wiring.

CONNECTING THE WIRES (Fig.2)

9. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect ground wires to it. Otherwise, connect ground wire directly to the circular strap (A) and secure using green screw provided.
10. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

11. Raise the canopy (D) to the circular strap (A), and then secure with the mounting screws (C) (Size: #8-32*0.5"L).
12. Install the fabric shade (Q) onto the candle sleeve (R).
13. Install (8) eight candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. **(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Fig.1

Set# A-020-120DC

- Circular strap
- Ground screw
- Mounting screws*2
- Junction box screws*2


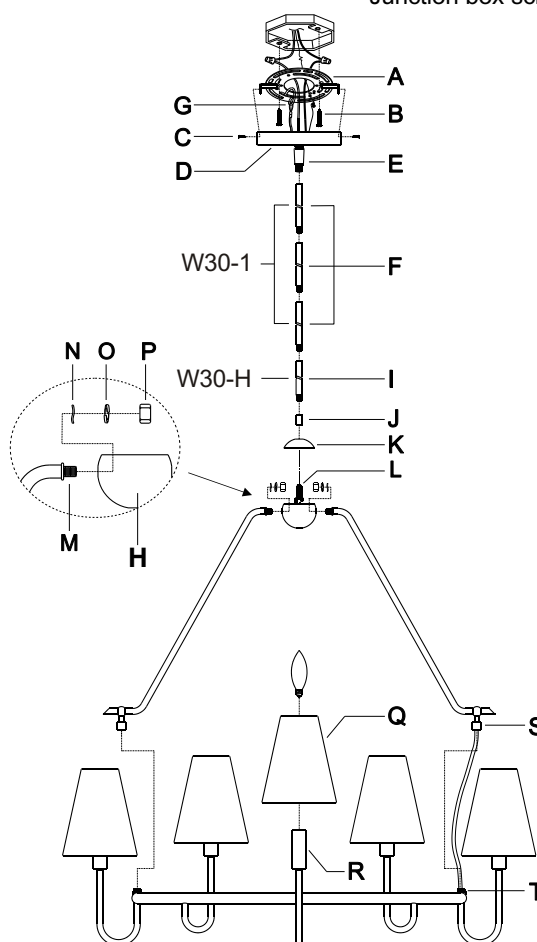


Fig.2



Your installation is now complete. Return power to the junction box and test the fixture.

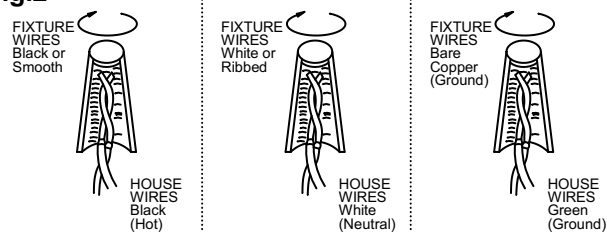

american
lighting
association