

INSTALLATION INSTRUCTIONS FOR 3103-84-L

For LED Bath Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR

MOUNTING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove the existing fixture and its mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Position mounting plate (A) on the wall and mark the location of the two drywall anchors (B). Pre-drill the holes for drywall anchors (B). Then insert drywall anchors (B) into the wall.
4. Attach mounting plate (A) to the junction box (not included) using mounting screws (E) (Size: 8-32*1/2"L). The side of the mounting plate (A) marked "GND" must face out.
5. Place wood screws (C) through the holes of mounting plate (A) and into drywall anchors (B) to secure mounting plate (A) to the wall.
6. Align glass (J) onto LED module (N) and carefully secure with screw (L) and plastic washers (K1). Align alabaster shade (I) onto fixture body (F) and carefully secure with screws (H) from the back of fixture body (F). (**CAUTION: Arrow Direction UP**)

CONNECTION THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw (D) provided.

FINISHING THE INSTALLATION (Fig. 1)

8. Place fixture (F) over mounting plate (A) and secure with screws (G).

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base or fixture body (F) only.

Replacing LED module (Fig.3)

The LED module can be replaced by a qualified electrician without cutting the wires and without damaging the decorative element to which the fixture is attached. See installation steps for more details (Fig 3.)

Warning: Turn off power at the fuse box or circuit breaker before replacing the LED module.

- a. To remove the fixture from the wall: loosen screws (G) and remove the wire connectors. Then place the fixture on a clear flat surface. (Fig. 1)
- b. Loosen screws (H) and remove alabaster shade (I). Loosen screws (L) washer (K1) and remove glass (J).
- c. Loosen screws (O) and gaskets (K2). Loosen nuts (P). Carefully remove LED module (N).
- d. Reverse steps a-c for installing the new LED module.

Note: The LED module should be provided by a specified supplier.

Fig.1

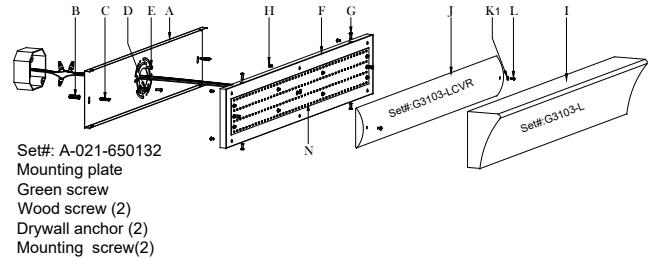


Fig.2


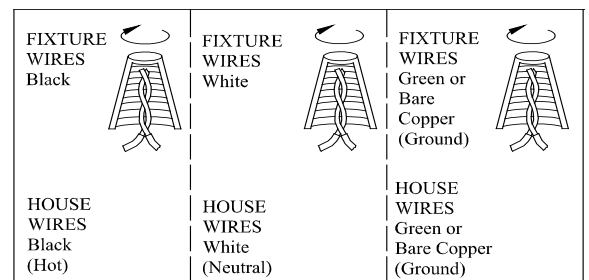


Fig.3



IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches.

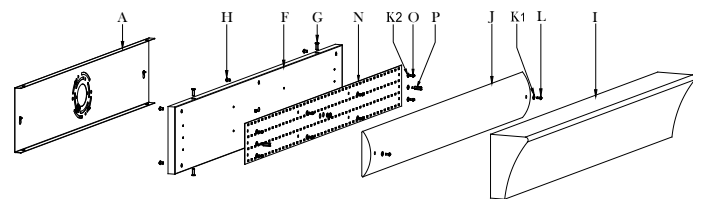