

INSTALLATION INSTRUCTIONS

New. 02/18/2008

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE BACKPLATE (Fig.1)

1. Shut off the power at the circuit breaker and remove old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the circular strap (A) to the Junction box with the Junction box Screws (B). The side of the circular strap marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

4. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the circular strap using the Green Screw provided. After the wires are connected carefully tuck them inside the Junction box.

FINISH MOUNTING FIXTURE (Fig.1)

5. Place the Fixture Body (E) over the circular strap (A), and secured with Allen Screws (D) by the Wrench (C).
6. Place Shade (F) over the lamp socket and secure with Screw Shell (G) tightly.
7. Install the PL bulb (H) (Included) in accordance with the fixture's specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**
8. The ballast and lamp are combined, to replace or install, twist pins into socket as shown Fig 3. Replace with Energy Star rated lamp for 10,000 hours and has a color temperature rating of at least 2700K.
9. This fixture is rated for a minimum start temperature of -18° Celsius (-34°F).

Your installation is now complete. Return power and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased

Fig. 1


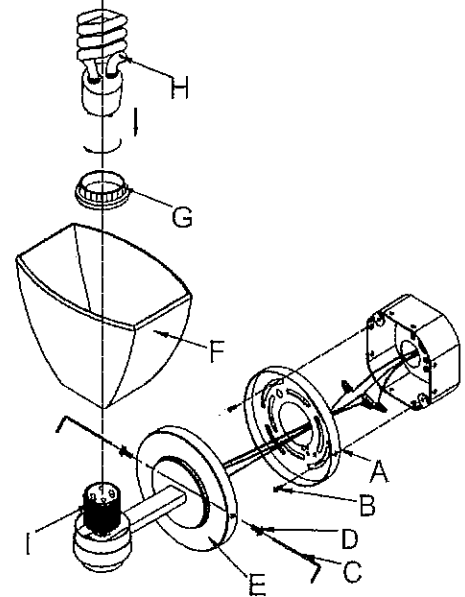



Fig. 2

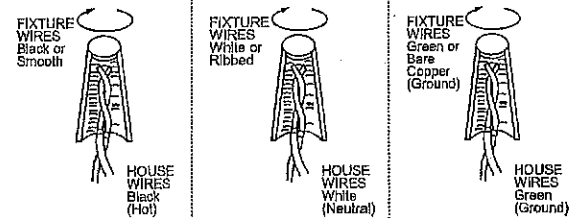

LIMITED 2 YEAR WARRANTY

The Minka Group warranty covers for a period of two Years from the day of purchase the replacement or repairs of the fixture housing and electrical components. This warranty is limited in that it does not include the lamp (bulb) or finish.

Fig. 3

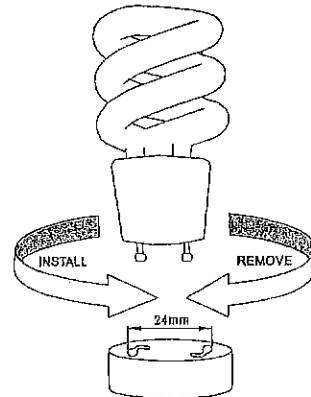

american
lighting
association

LA-1276E