

# INSTALLATION INSTRUCTIONS

Item#3814-863

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**VERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION THE FIXTURE

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Position mounting plate (A) on the ceiling and tight mounting plate (A) and tight with junction box screw (C).
4. Attach mounting plate (A) to junction box (Not included) using junction box screws (C). The side of mounting plate marked "GND" must face out.
5. Determine desired hanging height and use a pair of proper chain pliers to remove and discard excess chain. Then attach quick link (H) to the end of chain (E) and fixture loop.
6. Carefully feed wires through quick link (H), chain (E) and canopy (B).
8. You must tighten the glass (G1) to the attachment point with Using hands to clockwise. And tight second glass (G2) this is usually done by screwdriver (Not included) as shown in Fig 1. Illustration.
9. The support cable is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (A) and attach hook (V) on the end of support cable (X) into a slot located on mounting plate (A). Carefully allow the support cable (X) to support the weight of the fixture while wiring (Fig.1).

### CONNECTING THE WIRES



10. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors (F) are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided.

### COMPLETING THE INSTALLATION

11. Attach the canopy (B) to mounting plate (A) and tighten the canopy screw (D).
12. Install (4) four candelabra base bulbs (J) up to 40 watts or CFL or LED equivalent (not included) in accordance with the fixture's specification. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the outlet box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

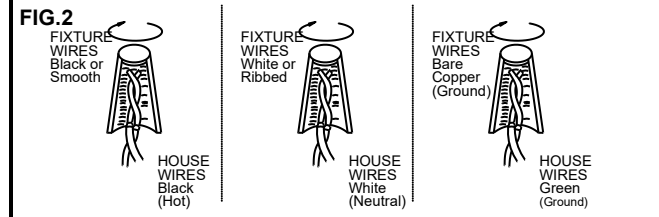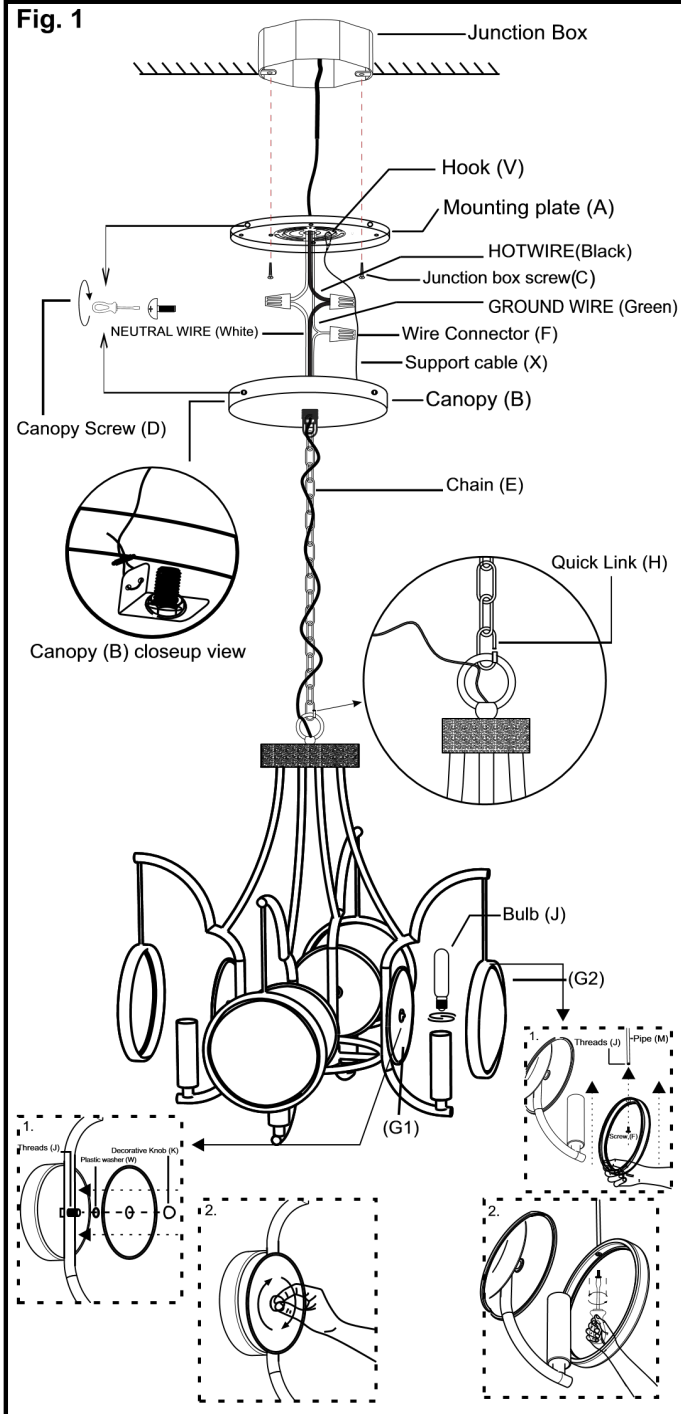

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



**PREPARATION THE FIXTURE FOR CONVERTING INTO FLUSHMOUNT**

13. Remove the canopy screw (D) from canopy (B) and loose wire connectors (F) (When power is off) to remove canopy (B) from mounting plate as shown in Fig. 3 & Fig.4.
14. Now unscrew the canopy (B2) and carefully drag the wire (Z) from up to down direction and remove the chain (E), canopy (B) and canopy cover (W) as shown in Fig. 4 & 5.
15. The support cable on canopy (B2) is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (A) and attach hook on the end of support cable (Y) into a slot located on mounting plate (A). Carefully allow the support cable (Y) to support the weight of the fixture while wiring (Fig.1).
16. Connect the wires using wire connectors (F). If the wire is too long, please cut the wire to your desired length as shown in Fig. 6.
17. Now attach your flush mount fixture to the mounting plate and tighten with screw (T) as shown in Fig. 7.

