

# INSTALLATION INSTRUCTIONS

For Model # 1276-357 (REV 05/16/2003)

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

## ASSEMBLING THE FIXTURE (Fig.1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Thread Pipe (B) into the top coupling of Light Assembly (D) tightly.
3. Slide Metal Column (C) downwards through Pipe (B), then secure with Loop (A) tightly.

## HANGING THE FIXTURE (Fig. 2)

4. Shut off power at the circuit breaker and remove old fixture including the crossbar.
5. Thread Nipple into Loop until snug.
6. Thread other end of Nipple with Loop attached into crossbar until snug.
7. Place Lock Washer over end of Nipple protruding through crossbar and thread Hex Nut onto nipple until tight.
8. Take this crossbar assembly and mount to ceiling junction box with junction box screws. Tighten screws securely with screwdriver.
9. By measuring determine correct number of links needed for proper hanging height.
10. Use a pair of pliers to open one end link of the chain, attach the chain to the fixture's loop, and close the link. Slip Loop Collar and Canopy over the chain. Open the other end link of the chain and lift the fixture to attach to the ceiling loop, close the chain link.
11. Lace the fixture's wires through the chain links and pull until taut. Feed the fixture wires through the loop and Nipple and pull until taut.

## CONNECTING THE WIRES (Fig. 3)

12. At this point, connect the electrical wire as shown in figure 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the crossbar using the Green Screw provided.
13. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling. Raise the Lock Collar and thread onto ceiling Loop protruding through canopy.

## FINISHING THE INSTALLATION (Fig. 1)

14. Install halogen bulb into the socket in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!).**
15. Place Bulb Shield (F) onto socket to protect the bulb, fasten Bulb Shield and iron sheet of socket together using Stud (E).
16. Place Glass Shade (G) along with lock washer (H) onto the light cup through Bulb Shield and socket, then secure with Stud (I).

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig. 1

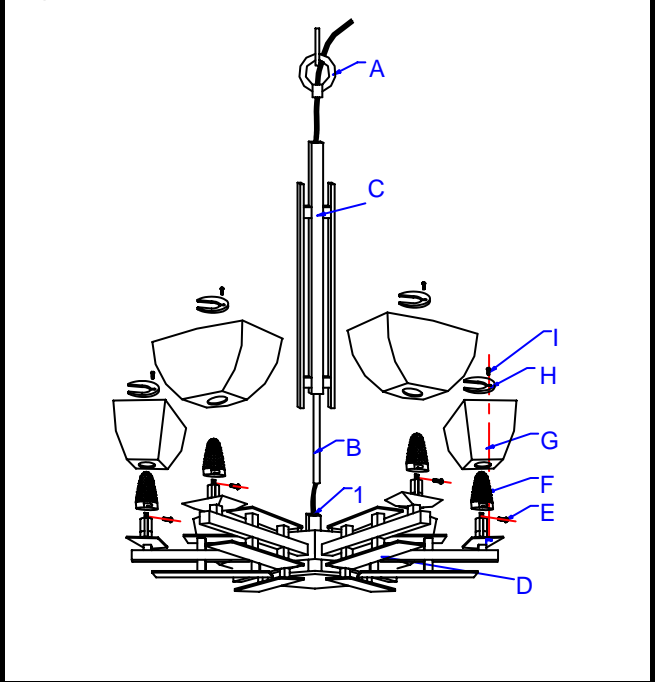


Fig. 2

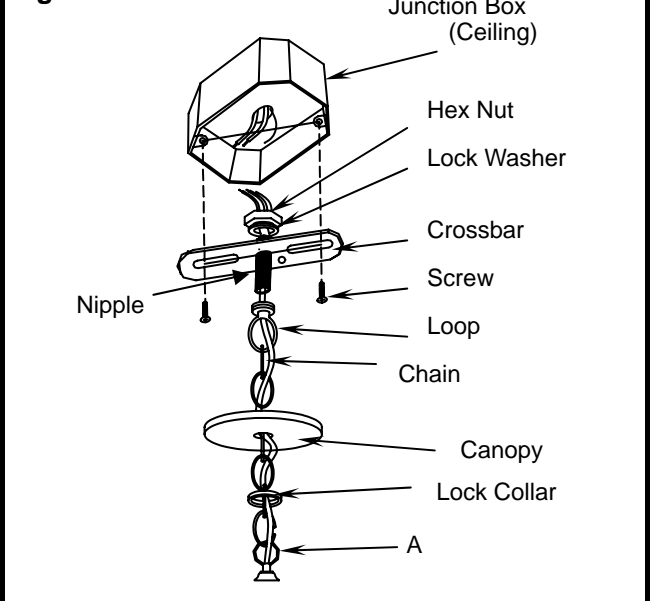


Fig. 3

