

# INSTALLATION INSTRUCTIONS

Item#4794-77-L (Rev:2018/12/17)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Position mounting plate (C) on the wall, and mark the location of the two plastic anchors (A). Pre-drill the holes for the plastic anchors. Insert the plastic anchors (A) into the wall.
4. Attach mounting plate (C) to the outlet box by using the mounting screws (B) (Size: #8-32N\*L0.5"). The side of the mounting plate marked "GND" must face out.
5. Place the wood screws (D) through the holes into the plastic anchors (A) to secure the mounting plate (C) as shown in Fig.1.

### CONNECTING THE WIRES (Fig. 2)

6. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.

### FINISHING THE INSTALLATION (Fig.1)

7. Place fixture body (E) over the mounting plate (C) and secure it with screws (F).
8. Place the glass shade (G) over the socket and fasten with socket ring (H).

Your installation is now complete. Return power and test the fixture.

**Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**CAUTION/ATTENTION:** When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the fixture body (E) only.

### Replacing LED module: (fig. 3)

The LED module can be replaced by a qualified electrician without cutting the wires and without damaging the decorative element to which the fixture is attached. See installation steps for more details.

(Fig. 3)

**Warning: Turn off power at the fuse box or circuit breaker before replacing the LED module.**

- a. To remove the fixture from the wall: remove screws (F), and remove the wire connectors. Then place the fixture on a clear flat surface. (Fig. 1)
- b. Unscrew socket ring (H), remove glass shape (G). (Fig. 1)
- c. Loosen screws (I), remove lens (J).
- d. Press the button of the printed "LED+" quick connector on LED module with screw driver to disconnected the black wire, then disconnect the white wire from the printed "LED-" quick connector on LED module.
- e. Carefully remove the LED module (L) from the heat sink (M).
- f. Reverse steps a-e for installing the new LED module.
- g. Note: The LED module should be provided by a specified supplier.

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.


Fig. 1

Set#A-021-750105

-Mounting Plate

-Ground screw

-Mounting Screw\*2

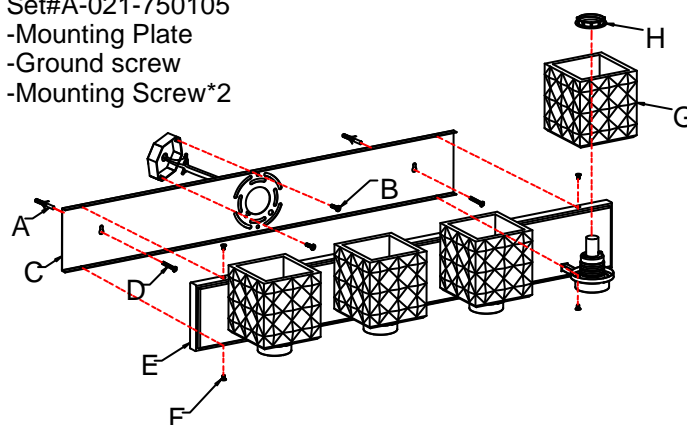

Socket ring # SKT-RING-26

Fig. 2


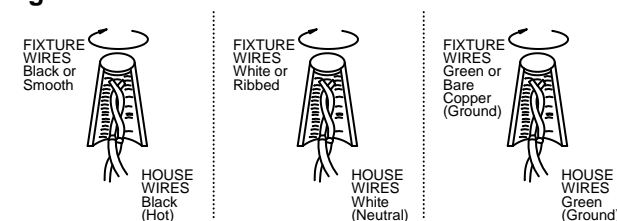


Fig. 3



**Dimmable with ELV and/or LED compatible wall dimmer switches.**

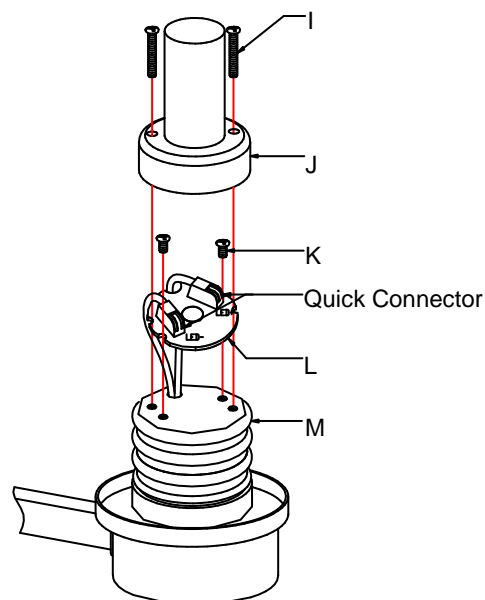

american  
lighting  
association