### INSTALLATION INSTRUCTION

Item# 12759-732

#### **READ AND SAVE THESE INSTRUCTIONS**

# WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER. AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

- 1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
- Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
   ASSEMBLING THE FIXTURE (Fig.1)
- 3. Install a 1/4" IPS pipe (not provided) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box as shown in Fig.1.
- 4. Secure hickey to the 1/4" IPS pipe with hex nut provided tightly.
- 5. Thread nipple into the hickey with hex nut provided tightly.
- 6. Secure collar loop (E) with hex nut on the other end of nipple. The length of nipple may be adjusted if necessary.
- 7. Determine desired hanging height and thread rods (I/J) on fixture frame
- (K). Pass wires and safety cable carefully through each rod as you assemble.
- 8. Secure fixture loop (H) onto rod (I) then connect quick link (G) to the fixture loop (H).
- 9. Slip screw collar ring (F) and canopy (D) over quick link (G) and rest on fixture loop (H). Then connect quick link (G) to the collar loop (H)on the nipple (C) of Hickey assembly. and close the quick link (G)
- 10. Feed fixture wires and safety cable carefully through the fixture loop (H), quick link (G), collar loop (E), screw collar ring (F), canopy (D) and nipple. And allow them to exit through the side of hickey. Run safety cable through the hickey one circle and secure safety cable with cable lock provided.

#### **CONNECTING THE WIRES (Fig.3)**

11. Connect the electrical wires as shown in Fig.3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. After the wires are connected, tuck them neatly into the outlet box.

#### **COMPLETING THE INSTALLATION (Fig. 2)**

- 12. Raise canopy (D) onto collar loop (E) and secure with screw collar loop ring (F).
- 13. From the inner square of fixture frame (K), attach the glass plate (M) onto threaded stud of fixture frame (K) with tighten barrel nut (L)
- 14. Install (9) nine candelabra base bulbs up to 60 watts or CFL or LED equivalent (not included) in accordance with the Fixture

Specification. — DO NOT EXCEED THE MAXIMUM WATTAGE

## RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).


- 15. Continue this process until all Glass Pieces (M) have been installed on the Fixture (K), complete the assembly. Your installation is now complete.
- 16. Glass must be assembled to the corresponding fixture frame with the same matching identification number to ensure proper fit and alignment.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING

Warning: to reduce the risk of fire, electric shock, or personal injury, mount to outlet box marked acceptable for fan support of 60 lbs. or more and use mounting screws provided with outlet box.

Warning: This luminaire must be mounted or supported independently of an outlet box.

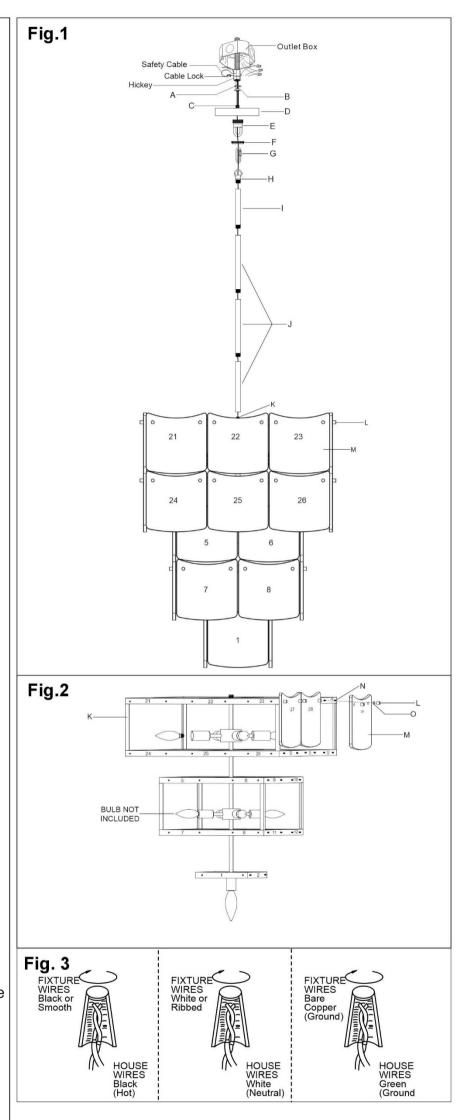



AND INSTALLATION.