

INSTALLATION INSTRUCTIONS

Item# 5286-788

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. To begin assembly of your fixture, first slip stem loop assembly (K) along wire and thread onto threaded tube (1).

HANGING THE FIXTURE (Fig. 2)

4. Thread all thread (D) into ceiling loop (F) until snug.
5. Thread all thread (D) into crossbar. Note: The length of the all thread (D) into crossbar maybe adjusted if necessary.
6. Use lock washer (B) and hex nut (E) to secure all thread (D) to crossbar (A).
7. Take crossbar assembly and mount to junction box (JB) "not provided" with 8-32 mounting screws. The side of crossbar (A) marked with "GND" must be face out.
8. Determined the desired hanging height and discard the excess chain. Note: 2x quick links are provided and they must attach to both ends of chain (J).
9. Open quick link (H) and connect to loops (F/K). Then close quick link (H).
10. Slip canopy (G) and collar ring (I) over quick link (H) and allow them to rest on fixture's loop (K).
11. Feed fixture's wires through ceiling loop (F), crossbar assembly and all thread (D).

CONNECTING THE WIRE (Fig. 3)

12. Connect the electrical wire as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to crossbar (A) using green screw provided.
13. Tuck wire connections neatly into junction box (JB).
14. Raise canopy (G) over ceiling loop (F) and secure with collar ring (I).

FINISHING THE FIXTURE (Fig. 1)

15. To begin installing the accessories, take crystal bobèche (cb) and slip down over candle sleeve (cs). Repeat the process until all crystals are fully installed.
16. Install 6x E12 base light bulbs (LB) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

DO NOT EXCEED THE MAXIMUM WATTAGERATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

FIG. 1

Set# A-
-Crossbar
-Ground Screw
-Mounting Screw *2

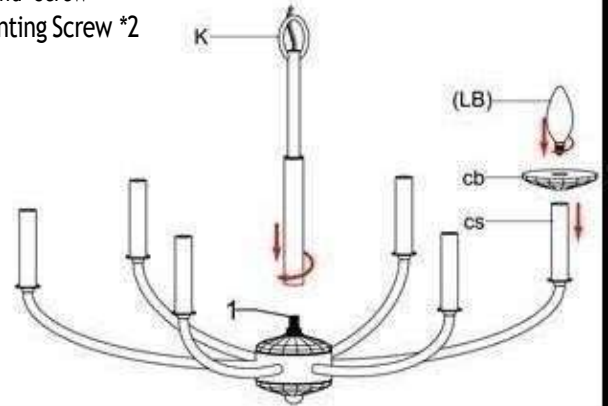


FIG. 2

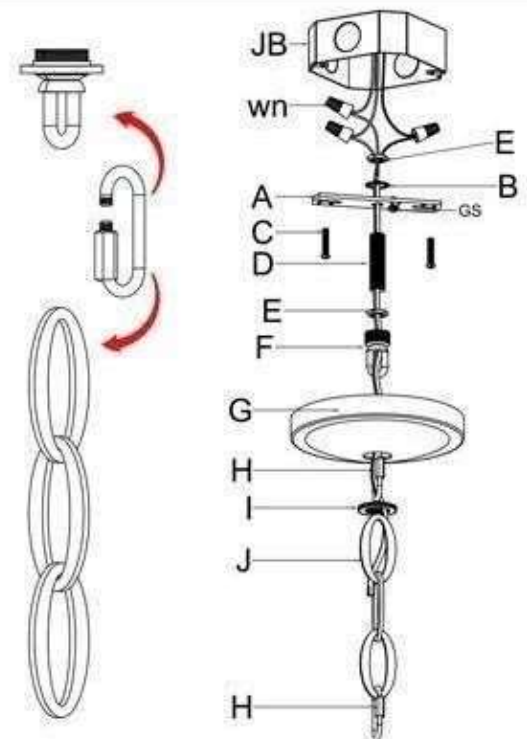


Fig. 3

FIXTURE WIRES
Black or
Smaranth



HOUSE WIRES
Black
(Hot)

FIXTURE WIRES
White or
Rihbwt



HOUSE WIRES
White
(Neutral)

FIXTURE WIRES
Bare
Copper
(Ground)



HOUSE WIRES
Green
(Ground)



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



american
lighting
association