

INSTALLATION INSTRUCTION

Item# 12854-732

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Attach mounting plate (A) to junction box (Not included) using Mounting screws (B) The side of mounting plate marked "GND" must face out.
4. Decide on a suitable length of the rods, the 15" rod can be separated into individual 6" (G2) or 9" (G1) rod depending on the desired hanging height.
5. Connect the quick link of rod (G1 or G2 or G1+G2) to the loop of fixture body (H) and loop of canopy (D), then close the quick link.
6. Carefully feed fixture wires through rod (G) and canopy (D).
7. The support cable is provided to support the weight the fixture while wiring. Align the fixture to mounting plate (A) and attach hook (N) on the end of support cable (O) into a slot located on mounting plate (A). Carefully allow the support cable (O) to support the weight of the fixture while wiring.

CONNECTING THE WIRE (Fig.2)

8. Connect the electrical wire as shown in Fig.2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate using green screw provided.

HANGING THE FIXTURE (Fig. 1)

9. Tuck wire connections neatly into ceiling outlet box and attach canopy (D) to mounting plate (A) and secure firmly with the canopy screws (E).

FINISHING THE FIXTURE (Fig.3)

10. Install (4) four candelabra base bulbs (L) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification – **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
11. Attach the glass (I) 1st Rubber Washer (P) followed by alabaster (J), secure with washer (P) the Nut (K)

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

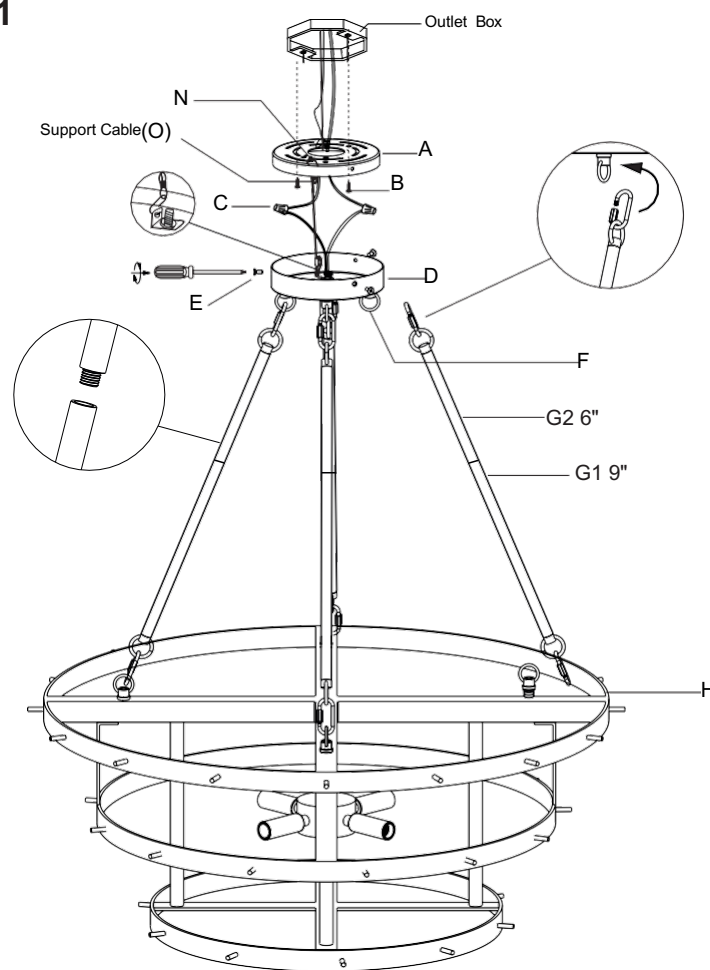


Fig.2


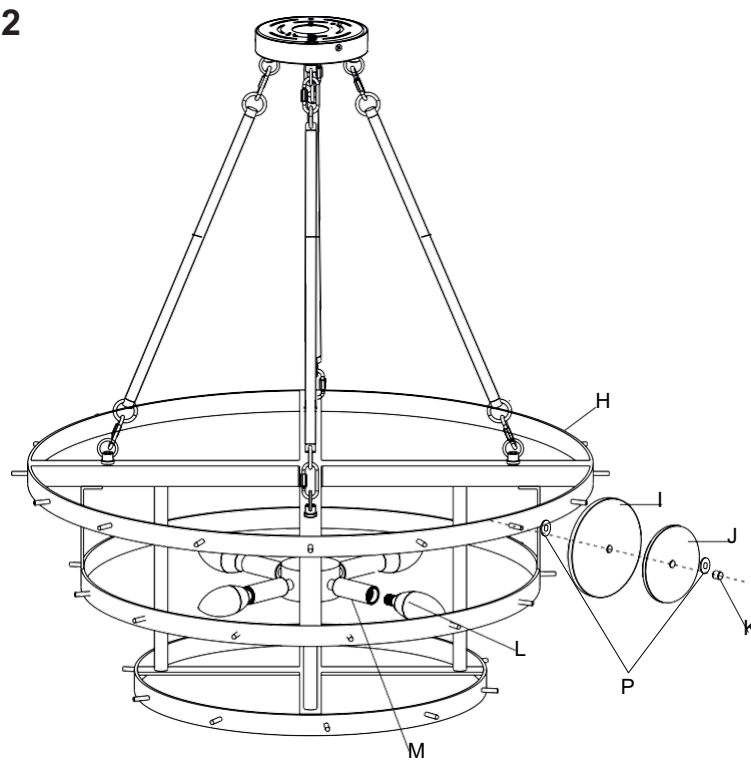


Fig. 3

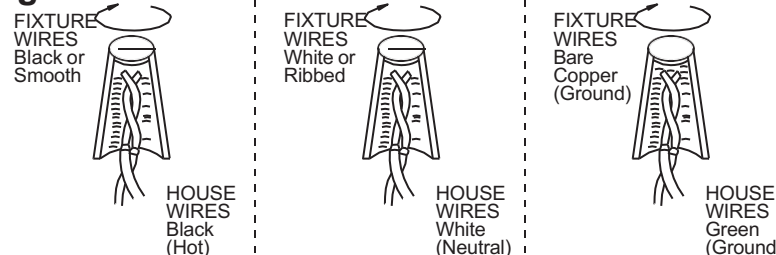

american
lighting
association