

# INSTALLATION INSTRUCTIONS

Model#73233-738

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Screw mounting screws (C) into mounting plate (B) ensuring they are spaced the same distance apart as the holes in the back plate (G) and tighten with hex nuts provided. The length of mounting screws (C) may be adjusted if necessary.
4. Attach mounting plate (B) using outlet box screws (F) to outlet box (A) (Not supplied). The side of mounting plate marked "GND" must face out. (Fig.1)

## CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig.2 with connectors (E), making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (B) using green screw (D) provided.
6. Tuck wire connections carefully inside outlet box (A).

## FINISHING THE INSTALLATION (Fig. 1)

7. Place back plate (G) over mounting screws (C), follow by rubber gasket (M), then secure to wall using cap nuts (H). (Fig.1)
8. Loosen screws (L) and separate fixture frame (O) from cover (J).
9. Install (3) three candelabra base bulbs (N) up to 60 Watts, or CFL or LED equivalent (not included), in accordance with the fixture specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
10. Secure cover (J) to fixture frame (P) by screwing screws (L) until tight.
11. To prevent moisture from entering outlet box (A) and causing a short, use clear silicone sealant to outline the outside of fixture back plate (G) where it meets the wall leaving a space at bottom to allow moisture a means to escape. (Fig.3)
12. To replace the glass, shut off power at the fuse box. Loosen screws (L) to separate top cover (J) from fixture frame (P). Remove nut (K) from the middle base (O), carefully pull out the middle base (O) and wires, then release the quick connection buckle (R) and remove middle base (O). Loosen glass clasp screws on fixture frame (P) to replace glass. Reinstall the glass clasp and middle base (O), then secure top cover (J) to fixture frame (P), then re-light the fixture.
13. This fixture is ETL listed for wet location applications.

Your installation is now complete. Return power to the outlet box and test the fixture.




american  
lighting  
association

**"CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR"**

**ATTENTION – RISQUE D'INCENDIE, CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.**


**Fig. 1**

Mounting Plate (1) (Part#A-020)  
Ground Screw (1)  
Mounting Screws (2)  
Candle Cover (3) (Part#CCV21054P-861)

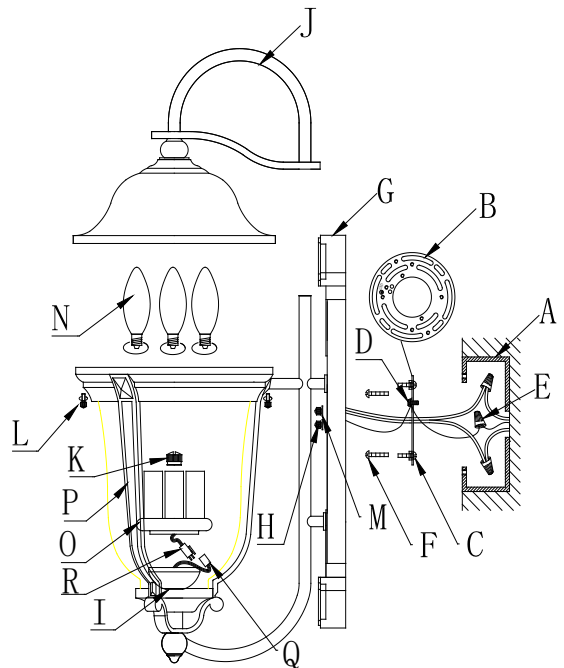

Glass code# G8841

**Fig.2**

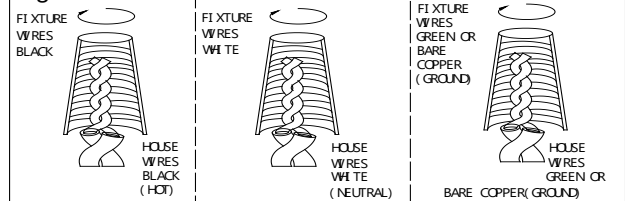

**Fig 3**

