

INSTALLATION INSTRUCTIONS

For Model 79201-66-L

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

HANGING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Position the mounting plate(D) on wall and mark location of four holes on mounting plate where plastic anchors(E) will be inserted. Drill holes into wall and insert plastic anchors(E).
4. Attach mounting plate (D) to outlet box (A) (not included) with outlet box screws (B). (Size: #8-32*0.78"L). The side of the mounting plate(D) marked "GND" must face out. And install the four wood screws (C) into the plastic anchors (E).

CONNECTING THE WIRES (Fig. 2).

5. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided.

COMPLETING THE INSTALLATION (Fig.1)

6. Align the fixture(H) to mounting plate (D) and secure with screws (F) & washers(G).
7. To prevent moisture from entering the outlet box and causing a short, use clear caulking (i.e. Indoor/Outdoor Silicone Sealant) to outline the outside of fixture back plate where it meets the wall leaving a space at bottom to allow moisture a means to escape. (Fig. 3)

8. Bulb information: Integrated LED module 1 x AC LED 20W included for 79201-66-L

DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Fig.1

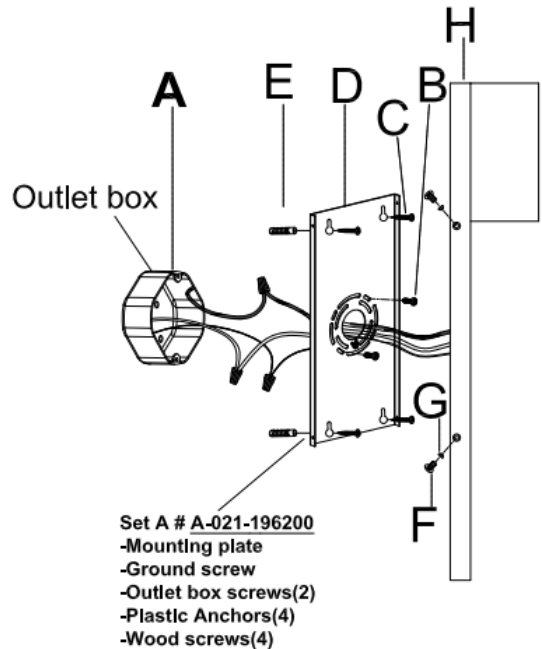


Fig. 2


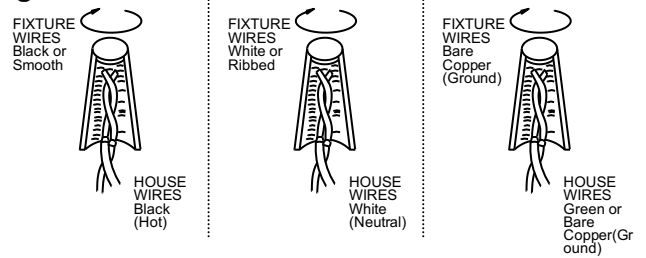


Fig. 3

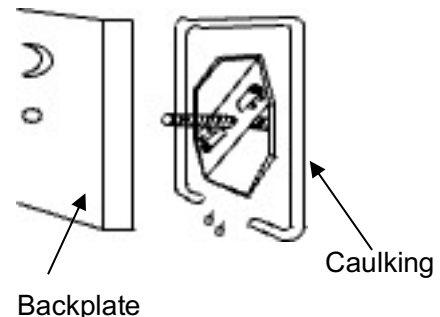

Your installation is now complete. Return power to the junction box and test the fixture.

INSTALLATION INSTRUCTIONS

For Model 79201-66-L

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

Replacing LED module (Fig.4)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 4.)

- Shut off the power.
- To remove fixture from the wall, loosen screws (F) and washers (G). Remove the wire connectors Place the fixture on a clear flat surface.
- Loosen screws (I) to remove Panel holder(J) and PC panel(K) from fixture (H).
- Loosen screws (L) to remove LED module (M) from fixture (H).
- Press the button on printed "L" quick connector on LED module (M) with a pin (Not included) to disconnect black wire. Repeat by pressing the button on printed "N" quick connector on LED module (M) to disconnect white wire.
- Reverse steps b-e for installing the new LED module.
- Silicon seal should be applied in the cable entry.

Your installation is now complete. Return power to junction box and test the fixture.

Fig.4

