

INSTALLATION INSTRUCTIONS FOR 79500-877-L, 79501-877-L FOR LED OUTDOOR WALL SCONCE

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

- 1 Shut off power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
- 2 Carefully remove the fixture from the carton and check that all parts are included as show in Figure 1.
- 3 Attach the mounting plate (A) to the junction box (not included) using the mounting screws (B) (Size: 8-32*1/2"L). The side of the mounting plate marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

- 4 Connect the electrical wires as shown in Fig.2, making sure that all wire nuts are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw (C) provided.
- 5 After the wires are connected, tuck them carefully inside the junction box.

FINISHING THE INSTALLATION (Fig.1)

- 6 Align the back plate (D) to the mounting plate (A) and secure with screws (F) and rubber washers (E).
- 7 To prevent moisture from entering the junction box and causing a short circuit, use clear caulking (i.e. Indoor/Outdoor silicone sealant) to outline the outside of fixture back plate where it meets the wall leaving a space at bottom to allow moisture a means to escape (Fig.3).

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LED. Hold the fixture by the base or back plate only.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.



Fig. 1

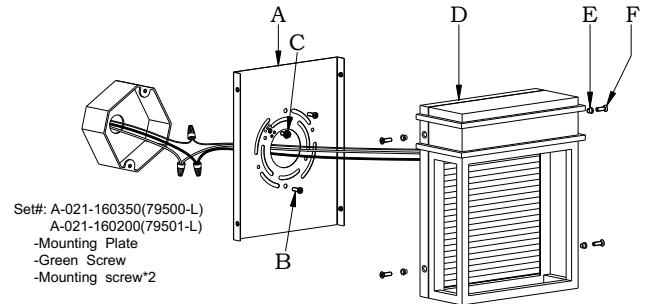


Fig. 2


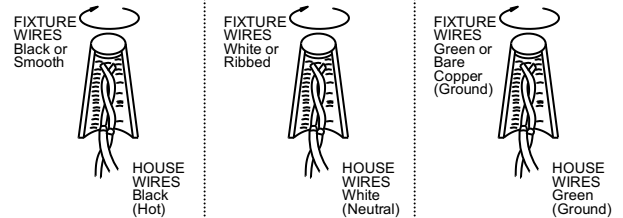


Fig. 3

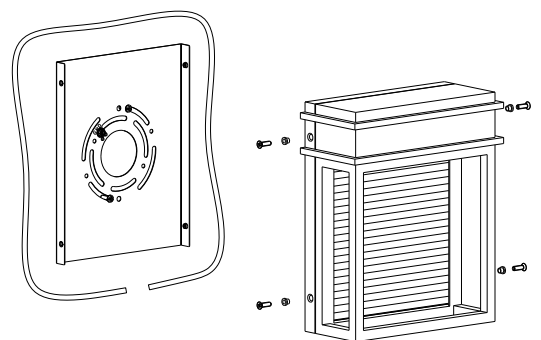

INSTALLATION INSTRUCTIONS FOR 79500-877-L, 79501-877-L FOR LED OUTDOOR WALL SCONCE

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

Replacing LED module (Fig. 4)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig. 4)

Warning: Turn off power at the circuit breaker before replacing LED module or LED driver.

- Shut off the power.
- To remove fixture from the wall, loosen screws (F) and washers (E). Remove the wire connectors and place the fixture on a clear flat surface (Fig.1).
- Loosen screws (G) and key washer (H), remove fixture body (I) from back plate.
- Loosen screws (J), remove diffuser glass (K).
- Loosen screws (L), remove aluminum post (M), gasket (N) and LED module (O).
- Reverse steps b-e for installing the new LED module (O).

Replacing glass rod (Fig. 5)

- Shut off the power.
- To remove fixture from the wall, loosen screws (F) and washers (E). Remove the wire connectors and place the fixture on a clear flat surface (Fig.1).
- Loosen screws (G) and key washer (H), remove fixture body (I) from back plate.
- Loosen aluminum plate (P), remove glass rod (Q).
- Reverse steps h-j for installing the new glass rod (Q).

Your installation is now complete. Return power to junction box and test the fixture.

Fig. 4

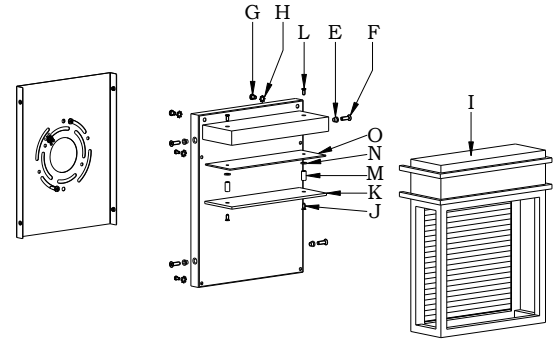


Fig. 5

