

INSTALLATION INSTRUCTIONS

Item#1405#1406-781

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Determine the desired hanging height and thread rods (H, I) to the all thread on top of fixture body (J). Pass the wires carefully through each rod as you assemble. Secure swivel (F) on canopy to rod (H). Carefully feed the wire through the swivel (F).
4. Thread screws (B) into the pre-drilled holes in crossbar (C) spaced the same distance apart as the holes in the canopy. The length of screws (B) may be adjusted if necessary.
5. Attach crossbar (C) to junction box (A) (not included) using mounting screws (D) (Size: #8-32N*L25mm). The side of the crossbar (C) marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in fig 2, making sure that all wire connectors (E) are secured. If your junction box (A) has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to crossbar (C) using the green screw provided.
7. Tuck the wire connectors neatly into junction box (A).

FINISH THE INSTALLATION (Fig. 1)

8. Slide screws (B) through the canopy and secure with finials (G).
9. Place shade (N) over socket (M) and secure with shade screws (L).
10. Place glass (O) over socket (M) and secure with socket ring (P).
11. Install (1) One medium base bulb (Q) up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

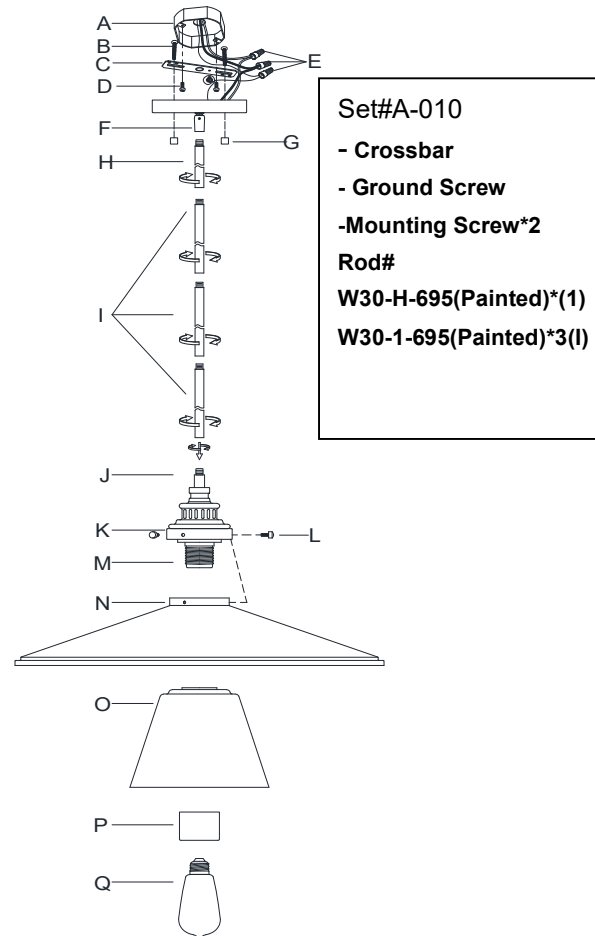


Fig. 2

