

INSTALLATION INSTRUCTIONS

Item# 1418-897

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1&2)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Ensure not to misplace any small part necessary for installation.
3. Remove mounting plate (A) from canopy (D) by removing the decorative ball nuts (E) located in canopy (D).
4. Attach mounting plate (A) to the junction box (JB) (*Not provided*) with junction box screws (B). The side of mounting plate (A) with marked "GND" and two convex points must face out.

MOUNTING THE FIXTURE (Fig.2)

5. When assembling the main body, there will be one set of parts that have the supply wire laced through.
6. Attach the hook of side stem (L) onto hook (M) of sub-canopy (J) and hook of fixture body.
7. Determine the desired hanging height and thread rods (H/I) onto coupler (1) of sub-canopy (J). Pass through the wire cord from one hole on the sub-canopy (J) and the rods (H/I).
8. Then thread the rods (H/I) to swivel (G) on the canopy (D).
9. The support cable (SC) is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (A) and attach hook (HK) on the end of support cable (SC) into a slot located on mounting plate (A). Carefully allow the support cable (SC) to support the weight of the fixture while wiring.

CONNECTING THE WIRE (Fig. 3)

10. Connect the electrical wire as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A).
11. Tuck wire connections neatly into junction box (JB)

FINISHING THE FIXTURE (Fig. 1)

12. To mount the fixture to the ceiling, place the 2x mounting screws (C) through the mounting holes (F) in the canopy (D).
13. While holding fixture in place, thread the two decorative ball nuts (E) at the end of the mounting screws (C) and tighten.
14. Install (12) twelve candelabra base bulbs (K) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specifications.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

FIG. 1

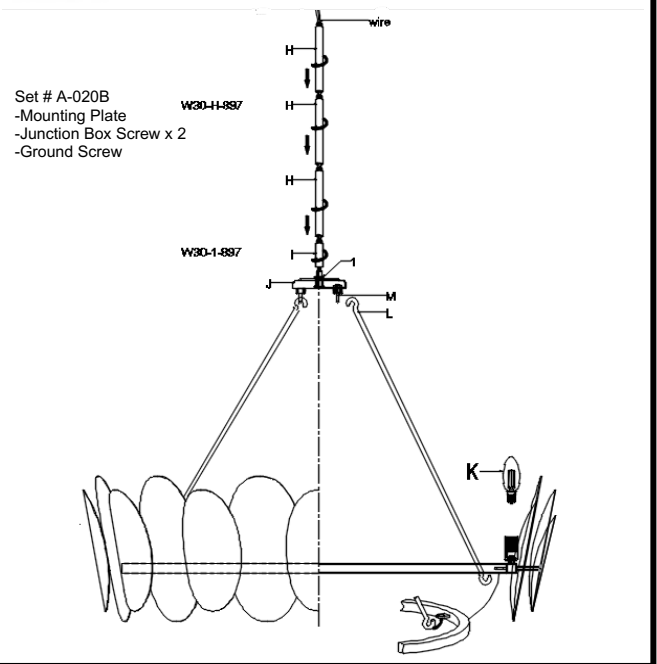


FIG. 2

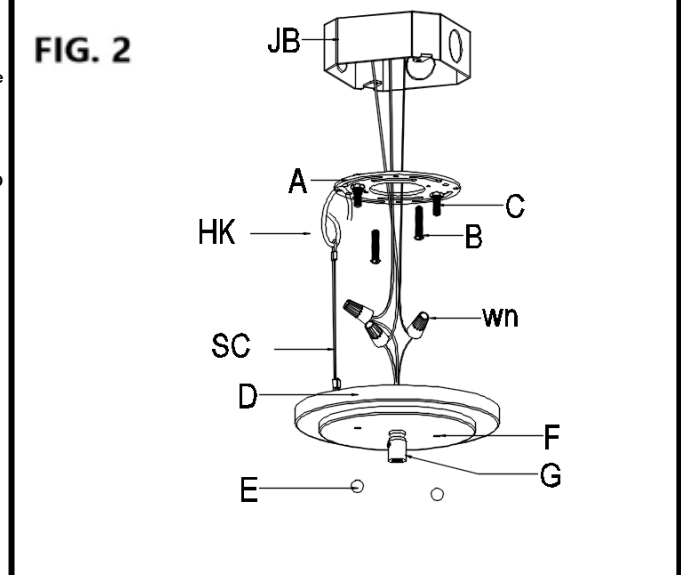


Fig. 3

