

INSTALLATION INSTRUCTIONS

For Model 8613-A61

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig 1)

1. Shut off power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Mount the circular strap to outlet box by using the two outlet box screws (Fig 1).
4. Thread the mounting screws into the pre-drilled holes in the circular strap spaced the same distance apart as the holes in the fixture.

CONNECTING THE WIRES (Fig 2)

5. Connect the electrical wires as shown in (Fig 2), making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise, connect the fixture ground wire directly to the circular strap using the green screw provided.

COMPLETING THE INSTALLATION

6. Align the fixture to the mounting screws on the circular strap and secure with knurled knobs (Fig 1).
7. To prevent moisture from entering the outlet box and causing a short., use clear caulking (i.e. Indoor/outdoor silicone sealant) to outline the outside of fixture backplate where it meets the wall leaving a space at bottom to allow moisture a means to escape (Fig 3).
8. For installing bulbs or replacing bulbs at a later date, remove the finial, bottom cap, bottom stem and glass shade housing (with care). Install 3*60W B10.5 bulbs (not included) to socket in accordance with the fixture's specification. After the installation, replace glass shade, bottom stem, bottom cap and secure with the finial (Fig1). **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

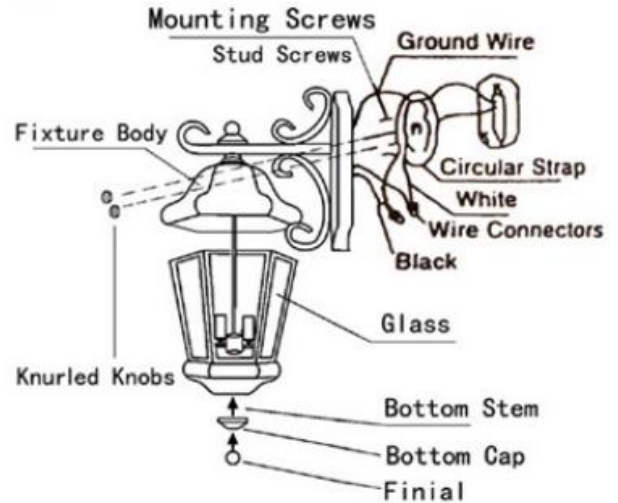


Fig. 2

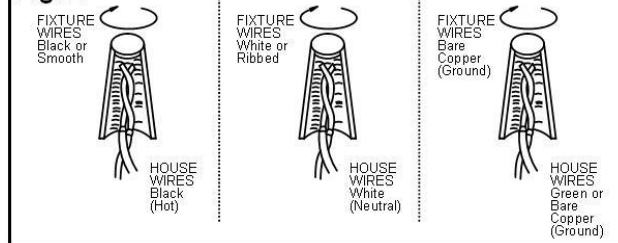


Fig.3

