

INSTALLATION INSTRUCTIONS

Model # 8694-PL/8694-1-PL

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker box and remove the old fixture from ceiling, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Thread one end of nipple (I) into crossbar (H) until snug and secure with lock washer (G) and hex nut (F). Note the length of nipple (C) into crossbar (H) may be adjusted.
4. Attach the crossbar assembly to the ceiling outlet box (not included) with screws (C).
5. Attach chain loop (D) to the nipple (I) protruding from the crossbar.
6. By measuring determine correct number of links needed for proper hanging height. Using a pair of proper chain pliers disconnect and discard the remaining chain.
7. Open one the end of the chain (E) and attach to loop (L) and close the chain (E). Slip loop collar (K) followed by the canopy over the chain and allow them to carefully rest on the fixture top cover.
8. Open the other end of the chain (E) and attach it to chain loop (D) and close the link.
9. Lace the fixture wires through the chain and crossbar assembly.

CONNECTING THE WIRES (Fig. 2)

10. At this point, connect the electrical wires as shown in Fig. 2. making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), attach this wire and the bare copper wire from the fixture together. Otherwise, attach the bare copper fixture wire to the crossbar using the green screw (B) provided.

COMPLETING THE INSTALLATION (Fig. 1)

11. Raise canopy (J) to the ceiling and secure with loop collar (K) to chain loop (D).
12. At this point, remove finial (N) and nut (O). Carefully remove cage (M) with glass to install (1*26W) bulb (included) in accordance with the fixture's specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RAITTING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
13. Replace the cage (M), secure with nut (O) and finial (N).
14. The ballast in each of these models can be replaced by a qualified electrician without cutting of wires and without damage to the housing, trim, decorative elements or carpentry to which the fixture is attached. See Fig.3 for more detail.
15. Contains Mercury (HG) Dispose of according to Local, State and Federal Law. (www.epa.gov/bulbrecycling)

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig. 1




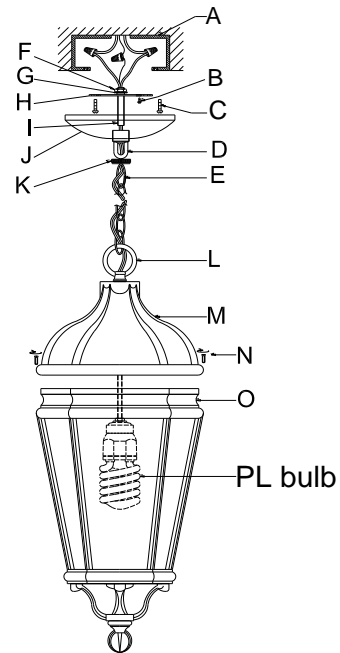


Fig.2

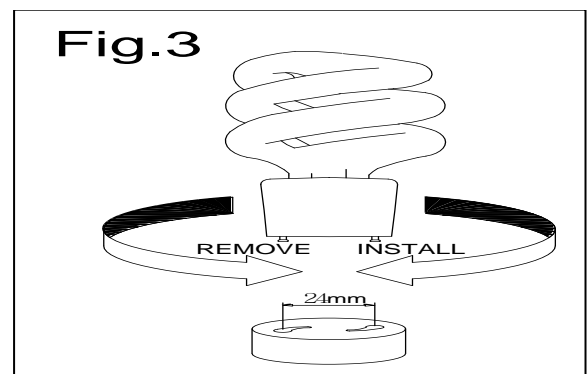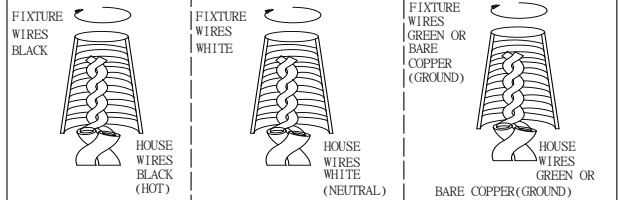

“CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”

ATTENTION – RISQUE D’INCENDIE, CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



U.S. Patent: D457,681
This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.