

INSTALLATION INSTRUCTIONS

Item#1465-xxx

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Align holes on bottom tube 1(O) with holes on bottom tube 2(P). Place ball stud (Q) from the bottom into holes on tube 1(O) and into holes in tube 2(P). Align holes at longer end of arm (N) with holes tube 1(O). Thread ball stud (Q) to secure in place. Repeat this step for remaining arms (N). DO NOT completely tighten ball stud(Q).
4. Position shorter end of arm (N) to hole of cylindrical box (L). Thread stud (M) through hole of cylindrical box (L) and shorter end of arm (N). Repeat this step for remaining arms (N). DO NOT completely tighten threaded stud (M).
5. After all arms (N) are attached, completely tighten all ball studs (Q) and threaded stud (M).
6. Place cover (K) on top of cylindrical box (L). Pass fixture wires through loop (J). Thread loop (J) onto top of cover (K). Connect one lock link (H) to loop (J). Adjust chain (I) to desired hanging height and use a pair of proper chain pliers to remove and discard excess chain.
7. Carefully lace fixture's wires through chain (I), skipping every other chain link. Slip lock collar (G), decorative slice (F) and canopy (D) down over end of chain (I) and fixture wires.

HANGING THE FIXTURE (Fig. 2)

8. Attach crossbar assembly to junction box (Not included) using junction box screw (B). Make sure the side of crossbar (A) marked "GND" must face out. The length of all thread into crossbar (A) may be adjusted if necessary. Then tighten with hex nuts provided.
9. Thread ceiling loop (E) onto all thread (W). Tighten ceiling loop (E) up against first hex nut on all thread (W).
10. Push fixture wires up through hole in ceiling loop (E) attached to crossbar (A) and out end of all thread inside junction box.
11. To aid in connecting fixture wires to house wires, connect another lock link (H) to link at end of chain (I) and ceiling loop (E).

CONNECTING THE WIRE (Fig. 3)

12. Connect the electrical wire as shown in Fig.3. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixtures ground wire to it. Otherwise, connect fixture ground wire directly to the crossbar using green screw provided.
13. Tuck wire connections neatly into the outlet box.

FINISHING THE FIXTURE (Fig.1)

14. Position canopy (D) and decorative plate (F) up against ceiling and secure with lock collar (G)

Fig.1

Set# A-016

-Crossbar

-Ground Screw

-Junction Box Screw x2

Candle Cover#
CCV21136P-894

Chain#
HCH2072-894


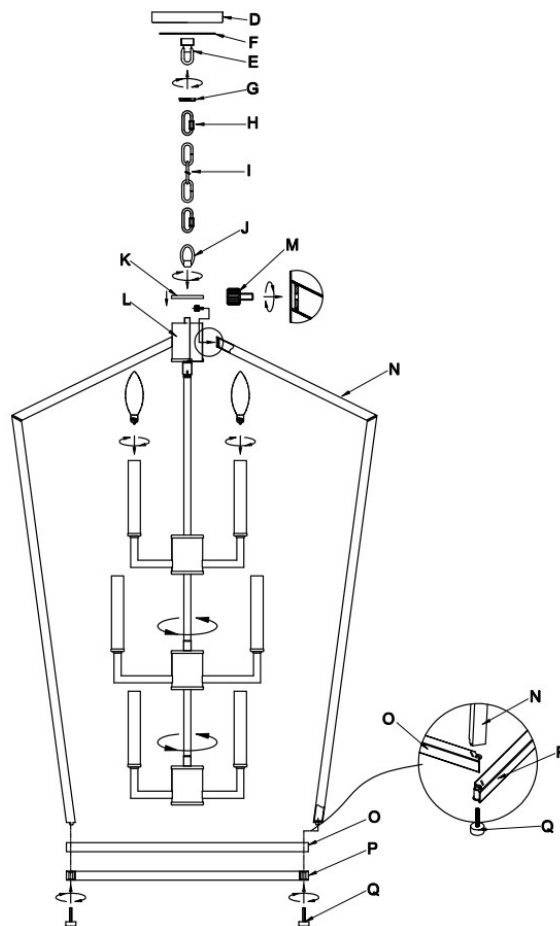


Fig. 2

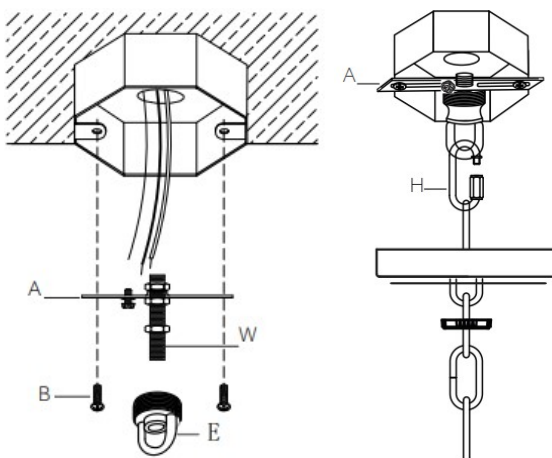


INSTALLATION INSTRUCTIONS

Item#1465-xxx

READ AND SAVE THESE INSTRUCTIONS


WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

15. Install (6) six candelabra base bulbs up to 60 watts each or CFL or LED equivalent (Not included), in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

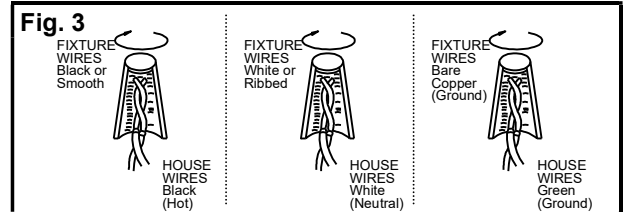

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

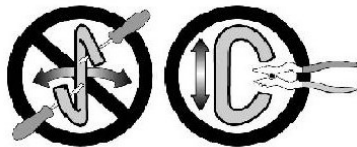

Notice: It is important to use proper chain pliers (not included) .To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.