

INSTALLATION INSTRUCTIONS

Item#15032-XXX-L

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Remove mounting plate (E) by removing screw (D), using the pre-drilled holes on Mounting Plate (E) to mark location to install anchors, and drill pilot holes on the marked spots and insert Anchors.
4. Attach the mounting plate (E) to the junction box (Not included) using the mounting screws (F) (size: 8/32*25mm) and Anchor Screws (C). The side of the mounting plate (E) marked "GND" must face out.
5. Use the ring (P) to install the glass (O), glass (Q), and glass (R) in sequence onto the socket (N) as shown in Fig.1.
6. Then align the cover (I) on the arm (H) with the thread (M) on socket (N) and gently secure the cover (I) into the thread (M). Do not over tighten.
7. Insert the arm (H) into the lamp body (L), tighten it with the screw (J) and allen wrench (K) provided.

CONNECTING THE WIRES (Fig. 2)

8. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided. After the wires are connected, tuck them carefully inside the junction box.

FINISHING THE INSTALLATION (Fig.1)

9. Place fixture body (G) onto mounting plate (E) and secure with screws (D).


Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig1

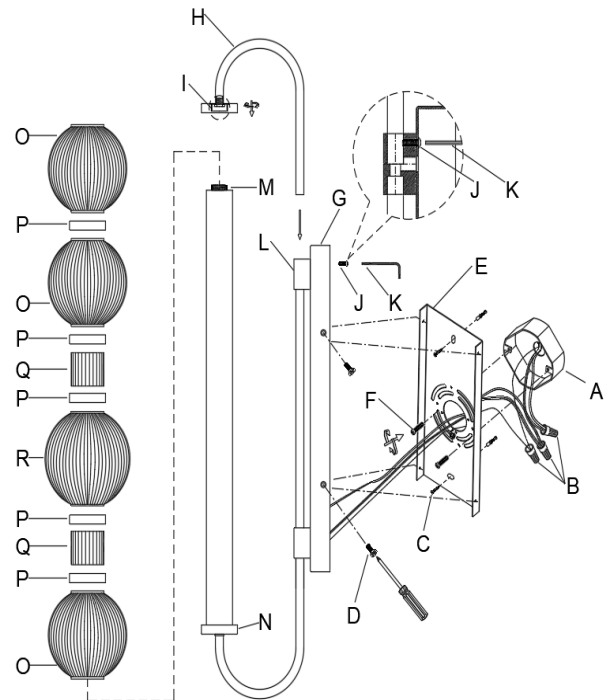

Set#

- Mounting Plate
- Ground Screw
- Mounting Screw*2

Fig. 2

