

INSTALLATION INSTRUCTIONS FOR 15255-732-L FOR FLASH MOUNT

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Position the mounting plate (A) on the ceiling and mark the location of the four drywall anchors (M). Pre-drill the holes for the drywall anchors (M). Then insert the drywall anchors (M) into the ceiling.
4. Attach the mounting plate (A) to the junction box (not included) using the mounting screws (C) (Size: 8-32*1/2" L). The side of the mounting plate marked "GND" must face out.
5. Place the wood screws (N) through the holes of the mounting plate (A) and lock into the drywall anchors (M) to secure the mounting plate (A) to the ceiling.
6. Align the one long acrylic tube (J) (The longer one is installed in the middle) and six short acrylic tubes (K) with aluminum poles (G), and tighten them appropriately.
7. Press the clip (L) of chain (I/H) and pass through onto the hole of the fixture body (F), then separate the clip (L) apart using a pin (not included) to hang tightly. (Sequence: I-H, short chains (H) on the inside, long chains (I) on the outside).
8. The support cable is provided to support the weight of the fixture while wiring. Attach hook (Z) on the end of support cable into a slot located on the mounting plate (A). Carefully allow the support cable to support the weight of the fixture while wiring.

CONNECTING THE WIRES (Fig.2)

9. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw (B) provided.
10. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION

11. Align the canopy (D) onto the mounting plate (A) and secure with screws (E).

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LED. Hold the fixture by the base or fixture body only.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Dimmable with ELV and/or LED compatible wall dimmer switches.



Fig.1

Set#: A-021-193
Mounting plate
Green screw
Wood screw (4)
Drywall anchor (4)
Mounting screw(2)

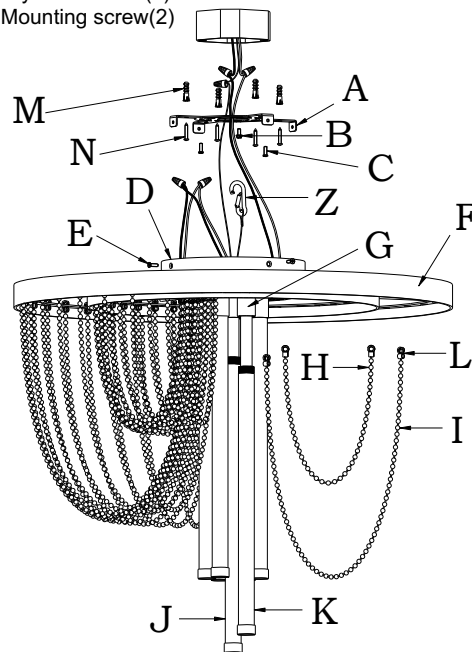





Fig.2

DRIVER INPUT WIRES Black		DRIVER INPUT WIRES White		FIXTURE WIRES Green or Bare Copper (Ground)	
HOUSE WIRES Black (Hot)		HOUSE WIRES White (Neutral)		HOUSE WIRES Green or Bare Copper (Ground)	