

# INSTALLATION INSTRUCTIONS

Item#N7104-258B (Convertible Lamps for Pendant)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.

### ASSEMBLING THE FIXTURE WITH CHAIN LOOP (Fig.1)

3. Determine the desired hanging height and thread rods (F1, F2 and F3) to the nipple (I) of the fixture body (L). Then attach loop (H1) by screwing in to rod (F1). Note: remove the nipple if installing with one 6" rod only.
4. Attach the quick link (G) to loop (H1) and loop (H2) on the canopy (D), carefully feed the wire over loop (H1), quick link (G) and loop (H2).
5. Thread screws (A) into the pre-drilled holes in the circular strap (B) spaced the same distance apart as the holes in the canopy (D).
6. Attach the circular strap (B) to the Junction box using mounting screws (C) (Size: #8-32N\*L0.5"). The side of the circular strap marked "GND" must face out.

### CONNECTING THE WIRES (Fig. 2)

7. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided.
8. Tuck the wire connectors neatly into the ceiling Junction Box and then raise the canopy all the way to the ceiling.

### COMPLETING THE INSTALLATION (Fig. 1)

9. Thread screws (A) into canopy (D), and secure with knurled knobs (E).
10. Hang the crystal drops (N) and the crystal ball (M) to proper position of fixture body (L).
11. Place the tube (K) over the socket of the fixture body (L).
12. Install the light bulb(s) (J) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
13. Please note that this lamp is convertible from pendant to a semi-flush. The wire length is 144" for pendant, 7" for Semi. You can convert from a pendant to a semi-flush but once you cut the wire you are not able to convert back to a pendant.

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation**

© 2015 Minka Lighting, Inc.  
This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws."

Fig. 1

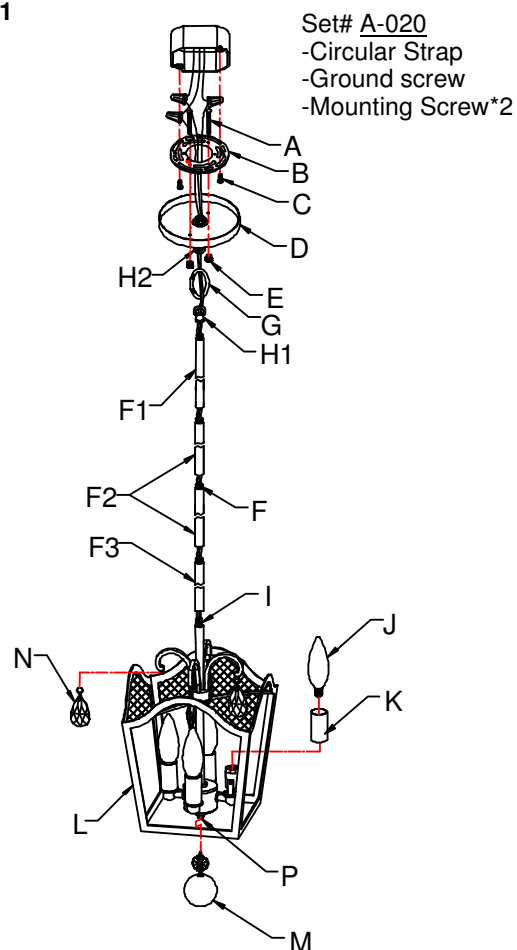
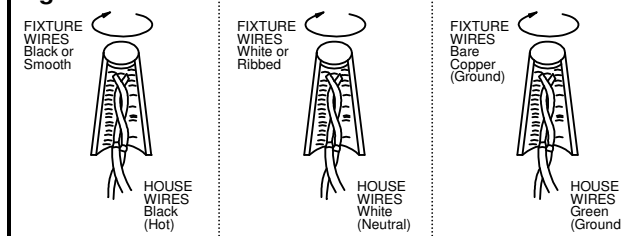
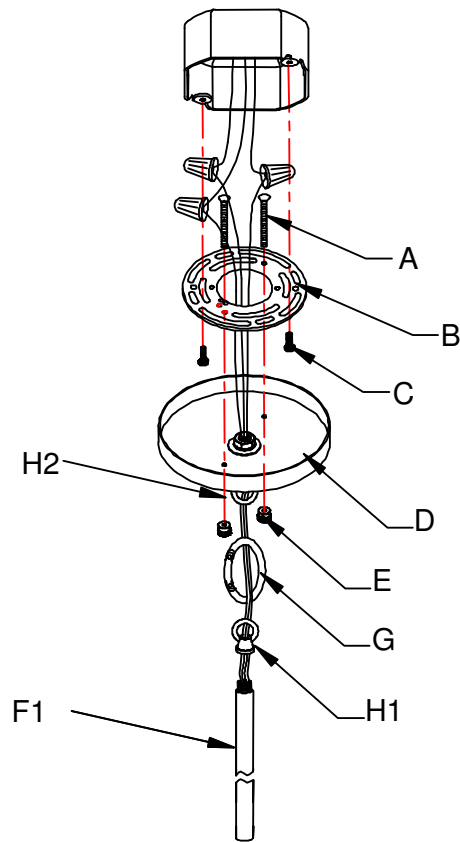


Fig. 2

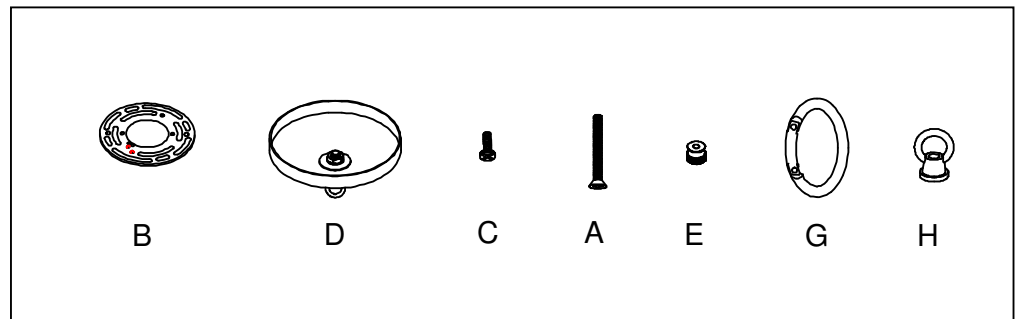


**Fig.3**




**a. Hardware Bag:**

- A. Screw\*2
- B. Circular Strap\*1
- D. Canopy \*1
- C. Mounting Screw\*2
- E. Knurled Knob\*2
- H. Loop\*2
- G. Quick Link\*1



**b. Hardware Bag:**

- F1. ROD 12"\*1
- F2. ROD 12"\*2
- F3. ROD 6"\*1

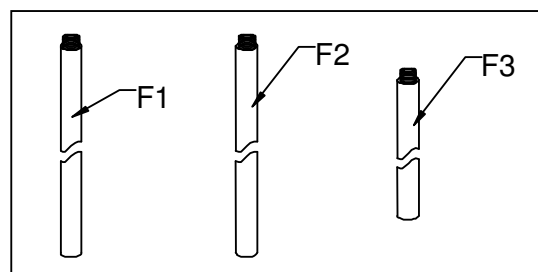

# INSTALLATION INSTRUCTIONS

Item#N7104-258B (Convertible Lamps for Semi Flush Mount)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig.4, Fig. 5)

1. Loosen hex nut (O) by using wrench (T). Carefully remove lock washer (R), washer (Q) canopy (D) metal plate (S) and loop (H). (Fig 5)
2. Thread canopy (D), metal plate (S), lock washer (R), washer (Q) and hex nut (O) into the nipple at the top of fixture body (L). Then secure hex nut (O) by using wrench (T). (Fig. 4)
3. Thread screws (A) into the pre-drilled holes in the circular strap (B) spaced the same distance apart as the holes in the canopy (D). (Fig. 4)
4. Attach the circular strap (B) to the Junction box using mounting screws (C) (Size: #8-32N\*L0.5"). The side of the circular strap marked "GND" must face out. (Fig. 4)

### CONNECTING THE WIRES (Fig. 2)

5. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided.
6. Tuck the wire connectors neatly into the ceiling Junction Box and then raise the canopy all the way to the ceiling.

### COMPLETING THE INSTALLATION (Fig. 4)

7. Thread screws (A) into canopy (D), and secure with knurled knobs (E).
8. Hang the crystal ball (M) and the crystal drops (N) to proper position of fixture body (L).
9. Place the tube (K) over the socket of the fixture body (L).
10. Install the light bulb(s) (J) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
11. Please note that this lamp is convertible from pendant to a semi-flush. The wire length is 144" for pendant, 7" for Semi. You can convert from a pendant to a semi-flush but once you cut the wire you are not able to convert back to a pendant.

Your installation is now complete. Return power to the junction box and test the fixture.

**Note:** Illustration (Fig. 4) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

© 2015 Minka Lighting, Inc.

This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws."

Fig. 4

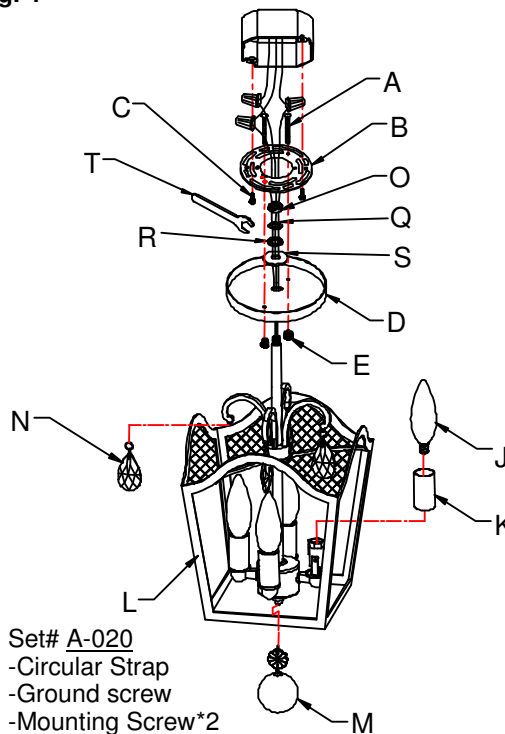


Fig. 5

