

# INSTALLATION INSTRUCTIONS

Item# P1183-613-L

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## ASSEMBLING THE FIXTURE (Fig.1)

- 1 Shut off power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
- 2 Carefully remove the fixture from the carton and check that all parts are included as show in Figure 1.
- 3 Loosen screws (F) and separate mounting plate (B) from fixture body (E).
- 4 Position mounting plate (B) on the wall, and mark the location of the two plastic anchors (A). Pre-drill the holes for the plastic anchors (A). Insert the plastic anchors (A) into the wall.
- 5 Attach mounting plate (B) to the outlet box using mounting screws (C) (Size: #8-32N\*L0.5") and wood screws (D) into plastic anchors (A). The side of the mounting plate marked "GND" must face out.

## CONNECTION THE WIRES (Fig. 2)

- 6 Connect the electrical wires as shown in Fig.2, making sure that all wire nuts are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground Wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided. Tuck the wire connections neatly into the junction box.

## FINISHING THE INSTALLATION (Fig. 1)

- 7 Align fixture body (E) onto mounting plate (B) and secure with screws (F).
- 8 Align glass shade (H) onto fixture body (E) and secure with screws (G).
- 9 Align outer frame (J) onto fixture body (E) and secure with screws (I).

Your installation is now complete. Return power to the junction box and test the fixture.

**CAUTION /ATTENTION:** When handling the fixture, do not apply pressure to the LED. Hold the fixture by the base or back plate (L) only.

## Replacing LED module (Fig. 3)


The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig. 3)

**Warning: Turn off power at the circuit breaker before replacing LED module.**

- a. To remove the fixture from the wall, loosen screws (F) and remove fixture body (E). Remove the wire connectors and place the fixture on a clear flat surface. (Fig. 1)
- b. Loosen screws (I) and remove outer frame (J), then loosen screws (G) and remove glass shade (H).
- c. Loosen finial (Q) and remove rubber washer (P), then separate glass panel (O) from back plate (L).
- d. Loosen screws (N) and hex nut (K), and carefully remove LED module (M) from back plate (L).
- e. Reverse steps a-d for installing the new LED module.

Note: The LED module should be provided by a specified supplier.

Fig. 1

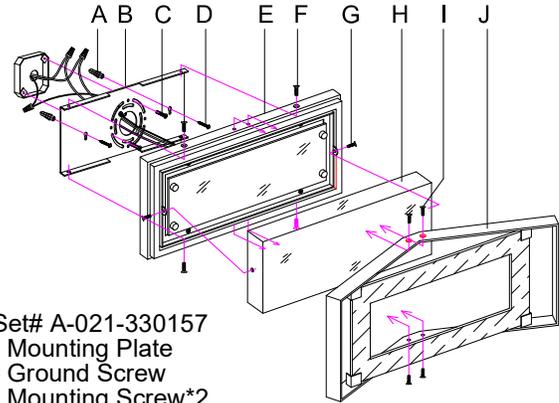

Set# A-021-330157  
- Mounting Plate  
- Ground Screw  
- Mounting Screw\*2  
- Wood Screw\*2  
- Plastic anchor\*2

Fig. 2


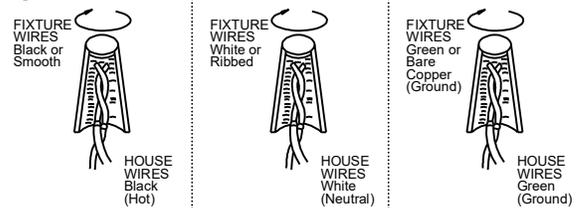


Fig. 3

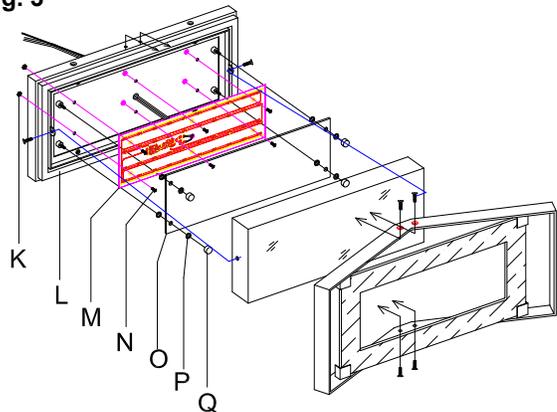

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and / or LED compatible wall dimmer switches

american  
lighting  
association