

INSTALLATION INSTRUCTIONS

Item# P1334-780

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Your fixture is supplied with 2 sizes of stem, 1x 6" and 3x 12".
4. To begin assembly of your fixture, first slip fixtures body (fr) along wire and nipple (1) cluster assembly and lock with knurled nut (2) to secure.
5. Slip stem (N) through wires and thread onto nipple (1) and tighten.
6. Thread stem (M) onto nipple (3) and tighten then slip through wires.
7. Determine the hanging height, then assemble the stems (L,K3,K2,& K1) with the loop then let the wires pass through and then thread stem assembly onto nipple (4) to secure to sub canopy (SC).
8. Connect the 4x stem hook (O) to fixtures body (fr) and sub canopy (SC) to prepare to hang the fixture.

HANGING THE FIXTURE (Fig. 2)

9. Thread all thread (D) into ceiling loop (F) until snug.
10. Thread the other end of threaded tube (D) into crossbar. Note, the length of the threaded tube (D) into crossbar may adjusted if necessary.
11. Use lock washer (B) and hex nut (E) to secure all thread (D) to crossbar (A).
12. Take crossbar assembly and mount to junction box (JB) "not provided" with 8-32 mounting screws. The side of crossbar (A) marked with "GND" must be face out. Note: 1x of quick link are provided.
13. Open and connect quick link (G) to fixture loop (J) then slip canopy (H) and collar ring (I) over quick link (G) and allow them to rest in fixture's loop (J).
14. You may need assistance on this step as may the fixture are slight heavy. Hang the fixture up and connect the quick link (G) to loop (F/J) then thread quick (G) closed to secure.
15. Feed fixture wires through ceiling loop (F) and crossbar assembly.

CONNECTING THE WIRE (Fig. 3)

16. Connect the electrical wire as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixture's ground wire to it. Otherwise connect fixture ground wire directly to crossbar (A) using green screw provided.
17. Tuck wire connections neatly into junction box (JB).
18. Raise canopy over collar loop (F) and secure with collar ring (I).

FINISHING THE FIXTURE (Fig. 1)

19. Install 6x E12 base light bulbs (LB) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

FIG. 1

Set# A
- Crossbar
- Ground screw
- Mounting Screw *2

ROD #
W35-1-780*3 (K1,K2,K3)
W35-H-780*1 (L)

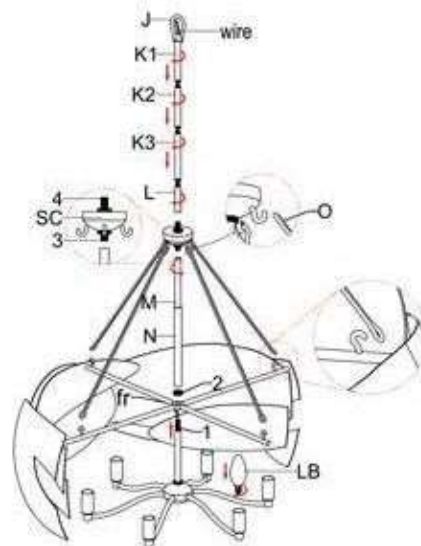


FIG. 2

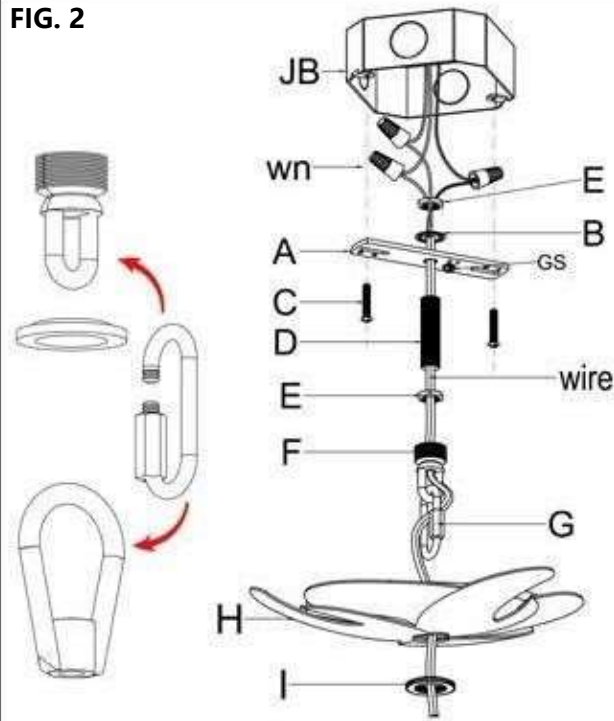


Fig. 3

