

INSTALLATION INSTRUCTIONS

Item# 1863X-XXX-L

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Secure junction box screw (F) (Size: 8/32*L1") to the junction box (not included) half a turn.

CONNECTING THE WIRES (Fig. 2)

4. Connect the electrical wires as shown in (Fig.2), making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture ground wire to it. After the wires are connected, tuck them carefully inside the junction box.

FINISH THE INSTALLATION (Fig. 3)

5. Rotate the canopy (D) to align the keyhole slots with junction box screw (F), then fully tighten the junction box screw (F).
6. Place the decorative ring (H) on the glass shade, Gently twist glass shade (I) onto the bottom of Canopy (D). Do not over tighten.

Replacing LED module (Fig.3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 3.)

- a. Shut off the power.
- b. Gently twist shade (I) and decorative ring (H) out of the bottom of the canopy (D).
- c. To remove fixture from the ceiling, unscrew junction box screw (F), disconnect wire connectors and place canopy (D) on a clean surface.
- d. Loosen the screws (L), remove the LED module (J) from the canopy (D).
- e. Reverse steps b-d for installing the new LED module.


Your installation is complete now. Return power to the junction box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig. 1

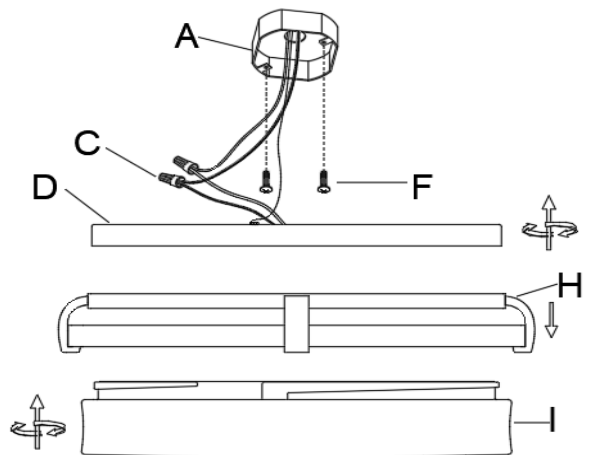

-Ground Screw
-Junction box Screw*2

Fig. 2

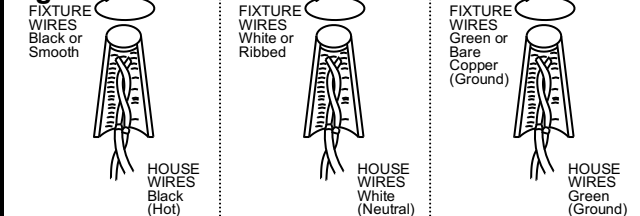


Fig. 3

