INSTALLATION INSTRUCTION FOR FIXTURE #1905-876

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER. AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (FIG. 1)

- 1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from ceiling. Including the mounting hardware.
- 2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
- 3. Attach mounting plate (E) to outlet box (Not included) using outlet box screws (F). The side of mounting plate marked "GND" must face out.


CONNECTING THE WIRES (FIG.2)


- 4. Connect the electrical wires as shown in Fig.2 making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate using green screw provided.
- 5. Tuck wire connections neatly into outlet box.
- 6. Attach fixture pan (O) over mounting plate (E) and let the mounting screws (H) protrude through the mounting holes on the fixture pan (O) and secure with cap nut (G) tightly.
- Thread the pipe (A) into the coupling (B), then Install
 (3) three medium base bulbs (C) up to 60 watts or CFL
 or LED equivalent (Not included) in accordance with
 fixture's specifications. (DO NOT EXCEED THE
 MAXIMUM WATTAGE RATING!) (NE PAS
 DEPASSER LA PUISSANCE NOMINALE
 MAXIMALE!).
- 8. Install glass shade (I), rubber washer (J), steel washer (K) over the pipe (A) in order and secure with hex nut (L). Then install the cap (M) over the pipe (A) and secure with finial (N). Do not over tighten.

Your installation is now complete. Return power to the outlet box and test the fixture.

Min 90°C supply conductors

Note: Illustration (Fig. 1) & (Fig.2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

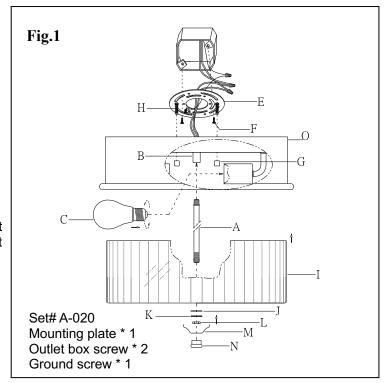

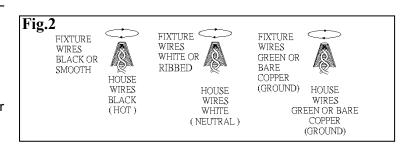

The fixture is over 10 lbs. Please remove glass shade (I) before removing fixture pan (O) from mounting plate to inspect wire connections in the future. This will allow you to hold the fixture body during wire connection or inspection or fixture removal.



