

INSTALLATION INSTRUCTIONS

Item#1974-1-138

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Thread hex nut (C) onto all thread (E). Insert the lock washer(B) and thread the all thread (E) into the crossbar (A) with hex nut (C). The length of all thread (E) into crossbar (A) may be adjusted if necessary.
4. Take this crossbar assembly (A) and mount it to outlet box with mounting screws (D) (Size: #8-32N*L0.6"). The side of crossbar marked with "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar (A) using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.

COMPLETING THE INSTALLATION (Fig.1)

6. After the wires are connected tuck them carefully inside the outlet box as you place the backplate (F) over the nipple (E). Secure the backplate (F) against the wall using Cap Nut (G).
7. Install (1) one candelabra base bulb up to 100 watts each or CFL or LED equivalent (not included) in accordance with fixture specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
8. Install glass(H) shade by referring to fig.1.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

Set# A-010

- Crossbar
- Ground screw
- Mounting Screw*2

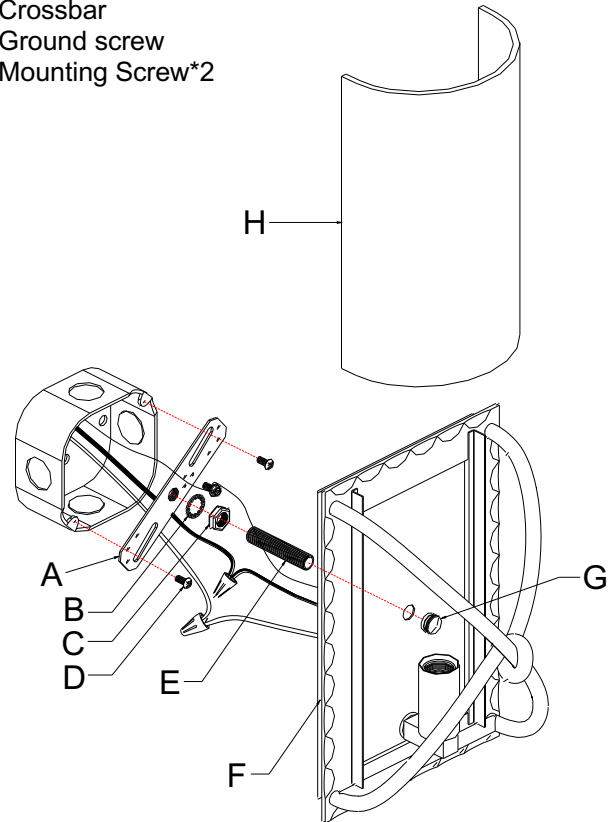


Fig. 2

