

# INSTALLATION INSTRUCTIONS

Item# 1975-1-138

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION

1. Shut off the power at the circuit breaker box and, if necessary, remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

### MOUNTING THE FIXTURE (Fig.1)

3. Thread two mounting screws (A) (Size: #8-32\*0.9"L) into circular strap (B) spaced same distance apart as holes in back plate (D). Length of mounting screws (A) into circular strap (B) may be adjusted if necessary. Attach circular strap (B) to junction box (not included) using junction box screws (C) (Size: #8-32\*0.6"). The side of circular strap (B) marked "GND" must face out.

### CONNECTING THE WIRES (Fig. 2)

4. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap (B) using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.

### COMPLETING THE INSTALLATION (Fig.1)


5. After the wires are connected tuck them carefully inside the outlet box as you place the back plate (D) over the mounting screws (A). Secure the back plate (D) against the wall using Cap Nut (F).
6. Install (2) two medium base bulbs up to 100 watts each or CFL or LED equivalent (not included) in accordance with fixture specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
7. Install glass (E) shade by referring to fig.1.

Your installation is now complete. Return power to the junction box and test the fixture.


**Fig.1**

Set# A-020

- Circular strap
- Ground screw
- Mounting screws\*2
- Junction box screws\*2

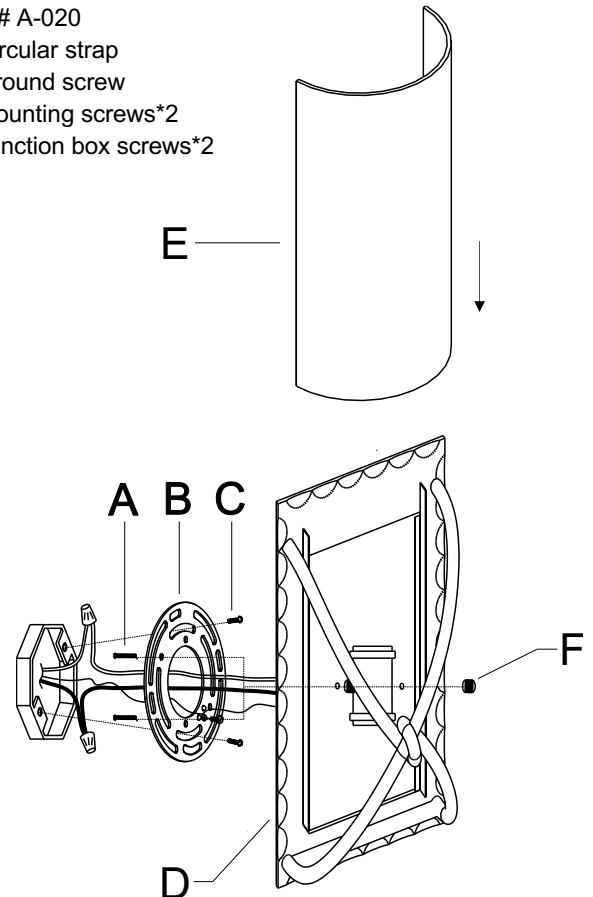

**Fig.2**

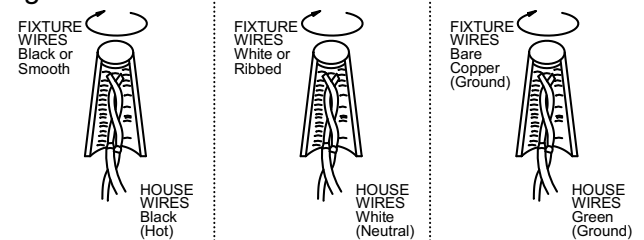

**MIN 90°C SUPPLY CONDUCTORS**