

INSTALLATION INSTRUCTIONS

Item#P1516-707-L (New. 04/13/2020)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Loosen the hex nuts (D) by using wrench (J) included, then remove metal washers (E), lock washers (F), metal support plate (I) and swivels (G).
4. Determine the desired hanging height and thread rods (F1, F2 and F3) to all thread (W) on the fixture body. Carefully pass the wires through each rod during assembly. Secure swivels (G) onto rods (F1).
5. Align canopy (H) and metal support plate (I) followed by lock washers (F) and metal washers (E) onto swivels (G) and secure with hex nuts (D) using wrench (J) included.
6. Position the mounting plate (A) on the ceiling and mark the location for the two drywall anchors (K). Pre-drill the holes for the drywall anchors (K). Then insert the drywall anchors (K) into the ceiling.
7. Attach mounting plate (A) to the outlet box using mounting screws (B) (Size: #8-32N*L0.5") and wood screws (O) into drywall anchors (K). The side of the mounting plate marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

8. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided. After wires are connected, tuck them carefully inside the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

9. Align canopy (H) onto mounting plate (A) and secure with screws (C).
10. Slide the glass tube (P) onto the bracket (S). While supporting the glass, attach glass holder (Q) to the bracket (S) with screws (R) to secure the glass in place.
11. Slide glass panel (N) through the brackets (M), secure with screws (L) using allen wrench (V) provided. Don't over tighten!

Replacing LED module (Fig. 3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 3.)


- a. Shut off the power.
 - b. Remove screws (C) and fixture body from mounting plate. Disconnect wire connectors and place fixture body on a clean surface.
 - c. Loosen screws (R), then remove glass holder (Q) and glass shade (P).
 - d. Loosen screws (L) and remove glass panel (N).
 - e. Press the button of the printed "L" quick connector on LED module (T) with screwdriver (not included) to disconnected the black wire, and then disconnect the white wire from the printed "N" quick connector on LED module (T).
 - f. Remove screws (U). Carefully remove the LED module (T).
 - g. Reverse steps b-f for installing the new LED module.
- Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

Set#A-021-290104

- Mounting Plate
- Ground Screw
- Mounting Screw*2

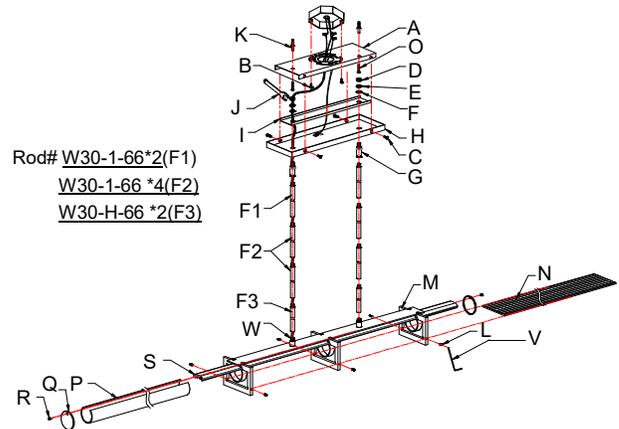

Spanner#WRH-Y-89

Fig. 2


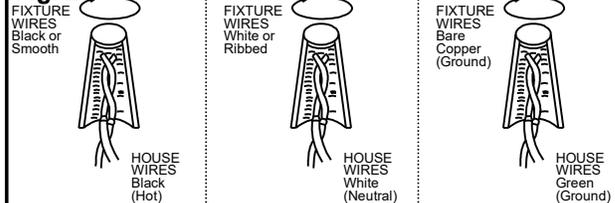


Fig. 3

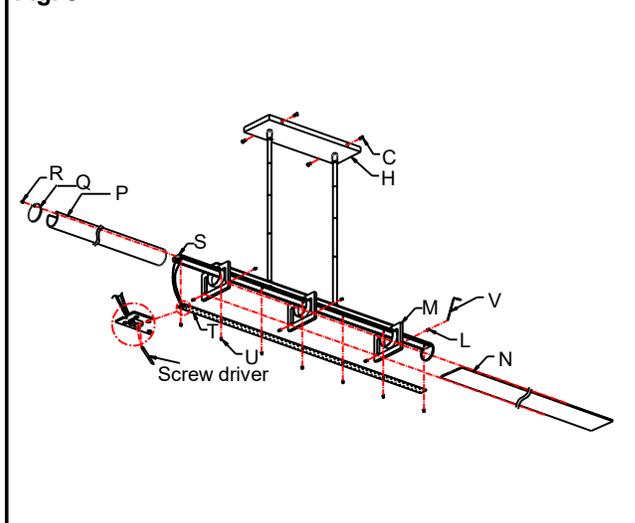

Dimmable with ELV and/or LED compatible wall dimmer switches.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

LA-3255E



Intertek

