

INSTALLATION INSTRUCTIONS

Item#P2016-613-L (New. 02/11/2019)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Place metal plate (G) over fixture (D). Screw glass (H) to fixture (D) and secure with screws (I). (Do not over tighten)
4. Remove the screws (C) and mounting plate (A).
5. Position the mounting plate (A) on the ceiling and mark location of the two mounting holes. Drill the holes on the ceiling, and then insert the plastic anchors (E).
6. Attach the mounting plate (A) to the junction box using mounting screws (B) (Size: #8-32N*L0.5"). Note: The side of the mounting plate marked "GND" must face out.
7. Secure the mounting plate (A) by inserting the wood screws (F) through the holes on the mounting plate (A) into the plastic anchors (E).

CONNECTING THE WIRES (Fig.2)

8. Connect the electrical wires as shown in Fig.2 making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided. Tuck wires neatly back into the junction box.

FINISHING THE INSTALLATION (FIG.1)

9. Secure fixture (D) to the mounting plate (A) by using screws (C).

Replacing LED module (Fig. 3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 3.)

- a. Shut off the power.
- b. Remove screws (C) and fixture body from mounting plate, disconnect the wire connectors, and place fixture body on a clean surface.
- c. Remove screws (I), unscrew glass (H) and remove metal plate (G) and glass (H).
- d. Press the button of the printed "L" quick connector on LED module (J) with a pin to disconnected the black wire, and then disconnect the white wire from the printed "N" quick connector on LED module (J).
- e. Remove plastic screws (K). Carefully remove the LED module (J).
- f. Reverse steps b-e for installing the new LED module.

For better heat dissipation the LED module (J) should be applied with thermal grease when re-lamping.

Your installation is now complete. Return power and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.
Dimmable with LED compatible wall dimmer switches.

Fig. 1

Set#A-020-256
-Mounting Plate
-Ground Screw
-Mounting Screw*2

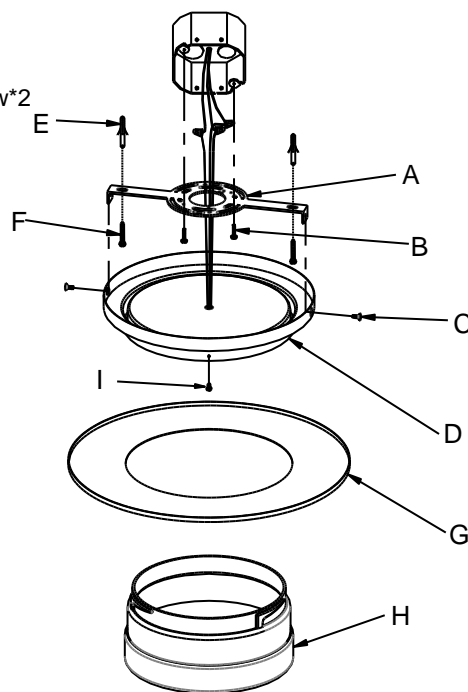


Fig. 2


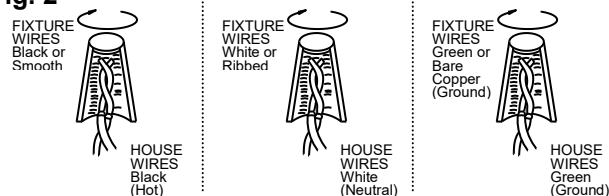


Fig. 3

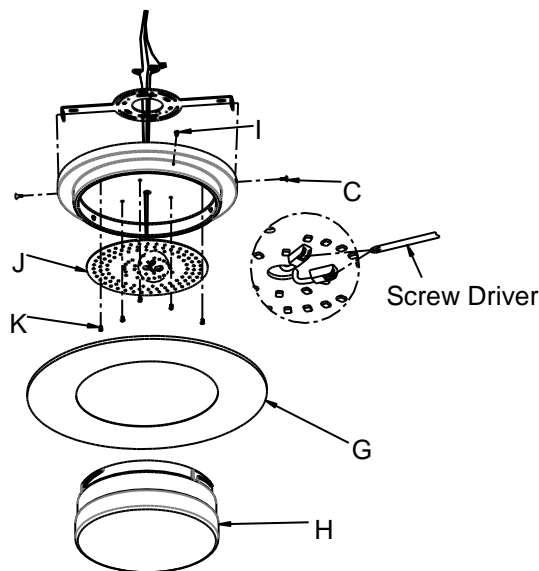

LA-3101E