

INSTALLATION INSTRUCTIONS

FOR P22-077-L

FOR LED Pendant Light

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT ! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR

PREPARING FOR INSTALLATION

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.

INSTALLATION (Fig. 1)

3. Remove the three mounting screws (DD) from the side of the canopy (A) and remove the mounting plate (BB).
4. Press the wire restraint (B) on the canopy (A) to adjust the cable to desired length (C).
5. Secure the mounting plate (BB) to the outlet box (not included) with the outlet box screws (CC). Tighten until snug.

CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (BB) using the green screw (AA) provided. Tuck the wire connections neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

7. Attach the canopy (A) to the mounting plate (BB) and secure with the mounting screws (DD).
8. Carefully attach the glass diffuser (E) to the fixture body (D) and secure with pin screws (EE).

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches.



Fig. 1

set# A-021-135

- Mounting plate
- Ground screw
- Mounting screws*3pcs

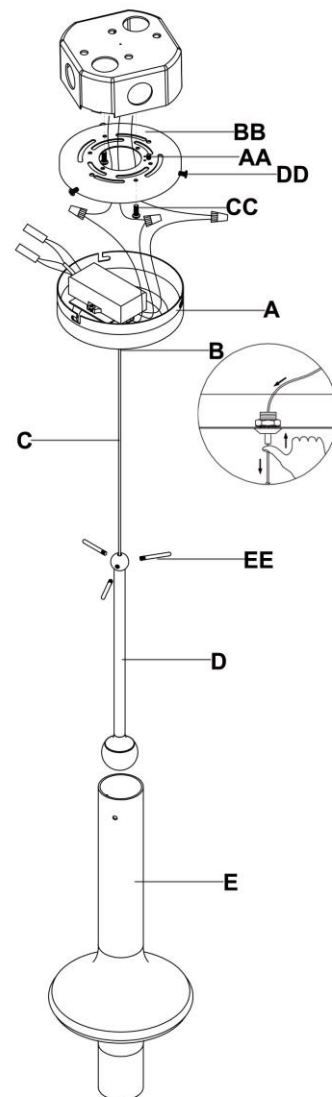


Fig. 2

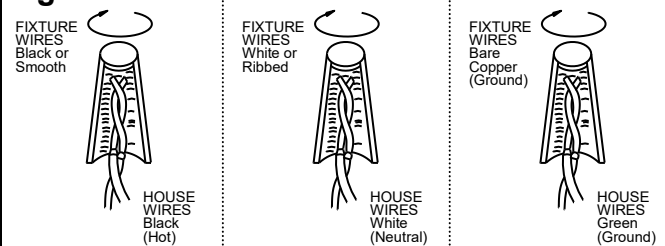


Fig.3

Replacing LED module (Fig. 3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig.3.)

- a. Shut off power. Carefully remove the pin screws (EE) take the glass diffuser (E) out from the fixture body (D).
 - b. Remove the three mounting screws (DD) from the side of the canopy (A).
 - c. Disconnect the wire by removing wire nuts. Take the whole fixture down to the working table.
 - d. Disconnect the wires of the driver by removing wire nuts. Press the wire restraint (B) onto the canopy (A) to release the cable (C) out from the canopy (A).
 - e. Remove the acrylic diffuser (F) from the fixture body (D).
 - f. Remove the two screws (HH) and washers (GG) from the fixture body (D).
 - g. Remove the LED module (FF) with cable (C) from the fixture body (D).
 - h. Reverse steps a-g for installing the new LED module.
- Note: The LED module should be provided by a specified supplier.

