

INSTALLATION INSTRUCTIONS

Item#P5439-697-L (Rev. 03/09/2023)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.

MOUNTING THE FIXTURE (FIG. 1)

3. Adjust wire length by pushing the metal collar while gently pulling or pushing the wire. When the metal collar is released, the wire will be fixed into position. Turn the fixture over and slide the plastic wire retainer up to the wire nut as a safety measure to prevent the pendant from slipping down when in use.
4. Position mounting plate (B) on ceiling and mark the location of two drywall anchors (A). Pre-drill holes for drywall anchors (A). Insert drywall anchors (A) into ceiling.
5. Attach mounting plate (B) to junction box (not included) using junction box screw (C) (Size: #8-32N*L1) and wood screws (D) into drywall anchors (A). The side of the mounting plate (A) marked "GND" must face out as shown in Fig.1.

CONNECTING THE WIRES (FIG. 2)

6. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (B) using the green screw provided. After wires are connected, tuck them carefully inside the junction box.

FINISHING THE INSTALLATION (Fig. 1)

7. Place canopy (F) onto mounting plate (B) and secure it with mounting plate screws (E).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purpose only. It may or may not be identical to the fixture purchased.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switch.

Fig. 1

Set # A-022-350112
- Mounting plate
- Ground screw
- Outlet box screw*2
- Wood Screw*2
- Mounting plate Screw*4
- Drywall anchor*2

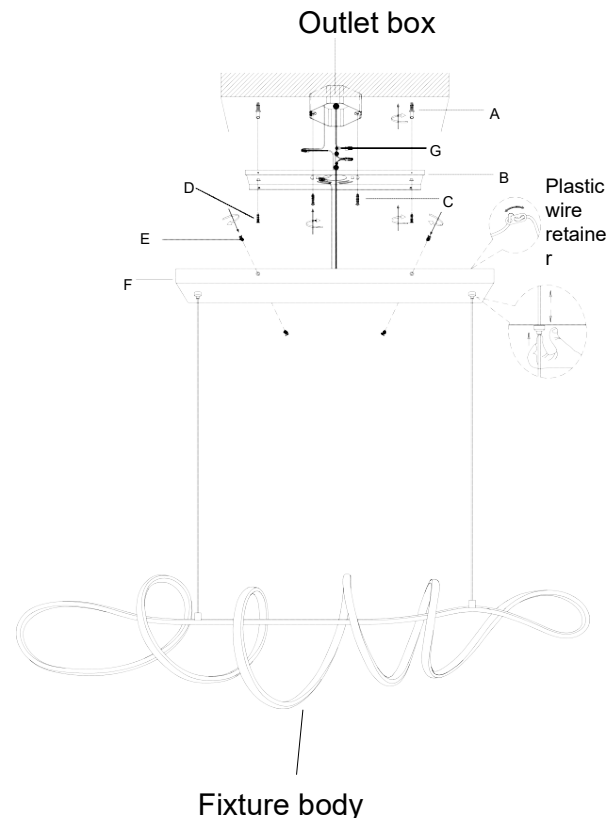


Fig. 2

