

INSTALLATION INSTRUCTIONS

Item# 19986-899 (New. 2025/09/07)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Be careful Not to misplace any small parts necessary for installation.

HANGING THE FIXTURE (Fig. 2)

3. Attach the mounting plate (B) to the junction box (not Included) with mounting screw (H). The side of mounting plate marked "GND" must be face out.
4. Determine the desired hanging height and use a pair of proper pliers to remove and discard excess chain (E).
5. Open one end of chain (E) and attach it to fixture loop (F1) with the help of Quick Link (G1) and allow them to rest on fixture body (P). Open the other end of chain (E) and attached it to ceiling loop (F2) with the help of quick link (G2) then close chain (E).
6. Carefully lace fixture's wires through chain (E).
7. Pass fixture wires through ceiling loop (F2) and Mounting Plate (B).
8. The supporting cable (M) is provided to support weight of fixture while wiring. Align fixture to mounting plate (B) and attach Hook (D) on end of supporting cable into a slot located on mounting plate (B). Carefully allow supporting cable (M) to support weight of fixture while wiring.

CONNECTING THE WIRE (Fig. 3)

9. Connect the electrical wire as shown in Fig.3, making sure that all wire connectors (C) are secure. If your junction box has ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (B) using green screw (N) provided.
10. Tucking the wire in the Junction Box.
11. Install the canopy (A) via canopy screw (K).

FINISHING THE FIXTURE (Fig.1)

12. Now, Hang Metal Leafs (L) one by one on Metal Frame of Fixture Body (P).
13. Tighten the Metal leaf (L) by Top Nut with Washer (I).
14. Install (1) one A19 base bulb (O) up to 40 watts or or LED equivalent (not included) in accordance with the fixture specification—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

- 1 Canopy (A)
- 1 Mounting Plate (B)
- 3 Wire Connectors (C)
- 1 Hook (D)
- 1 Chain (E)
- 1 Fixture Loop (F1) (1)
- 1 Ceiling Loop (F2) (1)
- 1 Quick Link (G1)
- 1 Quick Link (G2)
- 2 Mounting Screws (H)
- 4 Top Nut with Washer (I)
- 1 Glass Globe (J)
- 2 Canopy Screws (K)
- 4 Metal Leaf (L)
- 1 Supporting Cable (M)
- 1 Green Screw (N)
- 1 Bulb (O) (Not Included)
- 1 Fixture Body (P)

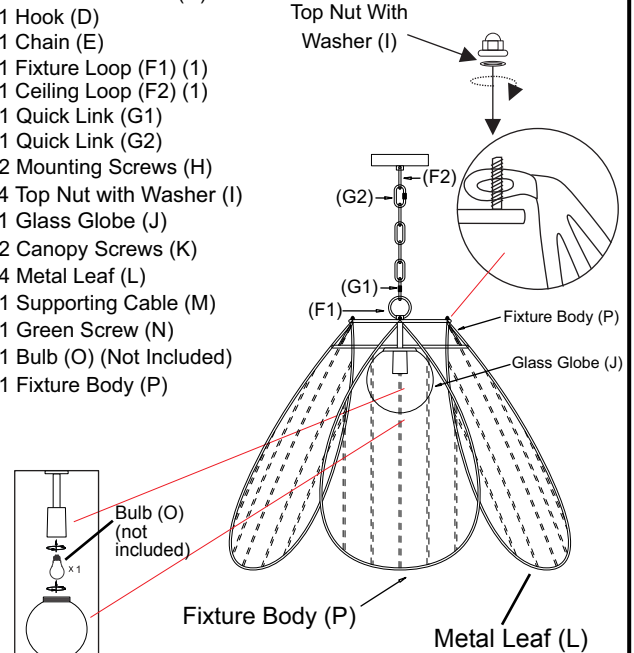


Fig. 2



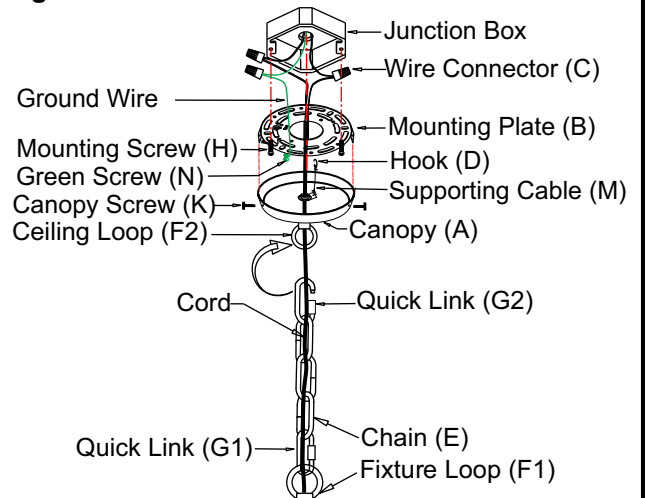


Fig. 3

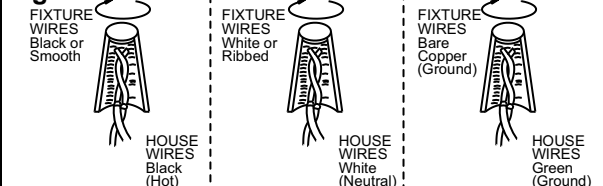

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.