

# INSTALLATION INSTRUCTIONS

Item#2262-84 (Rev. 04/23/2014)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE FIXTURE (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the existing fixture and its mounting hardware from the ceiling.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Thread the studs (E) into the pre-drilled holes of the circular strap (A) spaced the same distance apart as the holes in the canopy of the fixture body.
4. Attach the circular strap (A) to the outlet box with two mounting screws (B) (size: #8-32N\*L0.5"). The side of the circular strap marked "GND" must face out.
5. Thread the glass shade (J) over the wire and onto the metal ring (L).
6. Thread the cover (K) over the wire and onto the glass shade (J) to cover the metal ring (L).
7. Determine the desired hanging height and if necessary, cut the cord leaving an additional 5" to allow for electrical connection.
8. Remove metal screw (I) from metal bushing (H) and remove plastic screw (G) from plastic bushing (F), then pushing the cord through the center of metal bushing (H) and plastic bushing (F) until about 5" of the cord is exposed.
9. Secure the cord into metal bushing (H) and plastic bushing (F) by tightening metal screw (I) and plastic screw (G).
10. Carefully cut and remove approximately 4" of the outer sheathing from the cord and strip 1/2" of the wire ends bare to expose the copper strands.

### CONNECTING THE WIRES (Fig. 2)

11. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided.

### COMPLETING THE INSTALLATION (Fig. 1)

12. Place the holes of canopy (C) over the studs (E), and secure the canopy against the ceiling with knurled knobs (D).
13. Install the light bulb (s) (included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the outlet box and test the fixture.

**Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig. 1

Set# A-020

- Circular Strap
- Ground screw
- Mounting Screw\*2

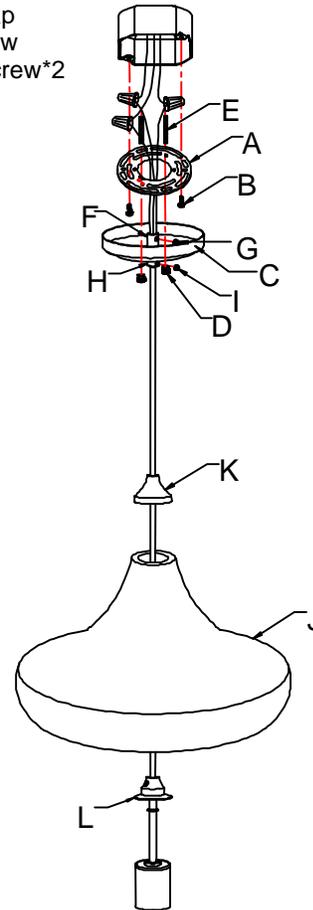


Fig. 2

