

INSTALLATION INSTRUCTIONS

Item#2294-613 (New. 11/17/2021)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the existing fixture and its mounting hardware from the ceiling.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Connect cable and fixture body together by threading nuts (I) at the end of cable into all thread (J) on fixture body. Adjust cable length by pushing wire strainer to keep fixture level.
4. Thread screws (A) into the pre-drilled holes of the circular strap (B) spaced the same distance apart as the holes in the canopy (D) of the fixture body. The length of screws (A) may be adjusted if necessary.
5. Attach circular strap (B) to the outlet box (not included) using the two mounting screws (C) (size: #8-32N*L0.5"). The side of the circular strap (B) marked "GND" must face out.
6. Remove metal screw (F) from metal bushing (E). Determine the desired hanging height by pushing or pulling the cord through the center of metal bushing (E).
7. Secure the cord by tightening metal screw (F) into the metal bushing (E). Cut excess wire leaving about 6" of the cord for the electrical connections.
8. Carefully cut and remove approximately 4" of the outer sheathing from the cord and strip 1/2" of the wire ends bare to expose the copper strands.
9. The support cable is provided to support the weight of the fixture while wiring. Align the fixture to circular strap (B) and attach hook (L) on the end of support cable (H) into a slot located on circular strap (B). Carefully allow the support cable (H) to support the weight of the fixture while wiring (Fig. 1).

CONNECTING THE WIRES (Fig. 2)

10. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap (B) using the green screw provided.
11. Tuck the wire connectors neatly into the outlet box.

COMPLETING THE INSTALLATION (Fig. 1)

12. Raise canopy (D) over mounting screws (A) and secure with finials (G).
13. Install (3) three medium base bulbs (K) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: The illustration in figure 1 on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set# A-020-A
- Circular strap
- Ground screw
- Mounting screw*2


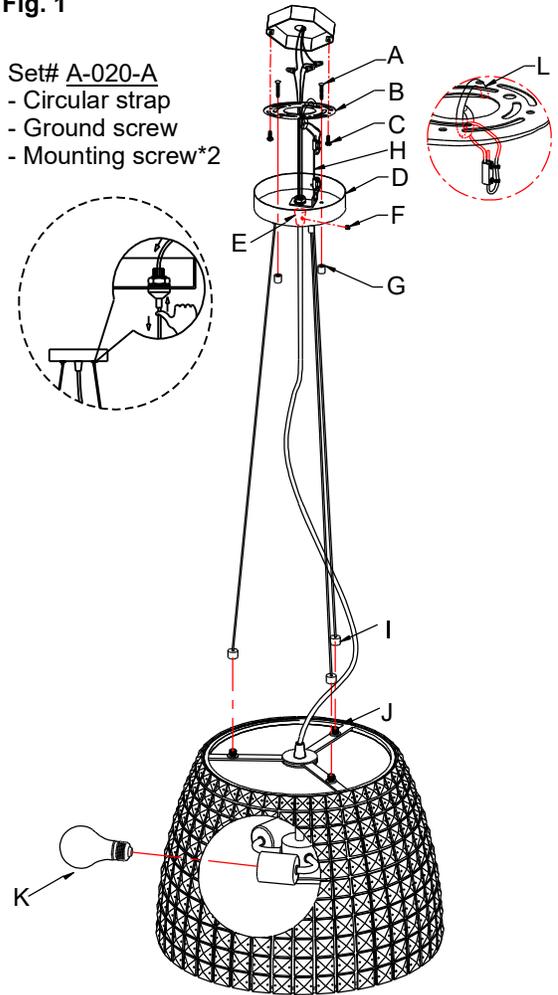


Fig. 2



LA-3504E

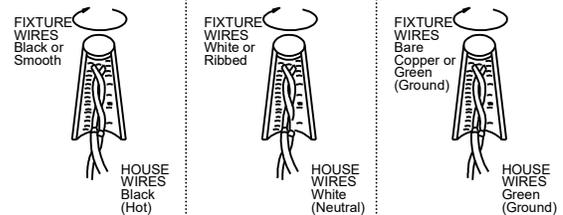

american
lighting
associates