

INSTALLATION INSTRUCTIONS

Item#2373-77(New.09/10/2017)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
3. The crossbar (B) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your Junction box. Attach the crossbar (B) to the Junction Box(K) using the two junction box screw(M)(size:8/32*25mm). Tighten the screws securely with screwdriver. The side of crossbar marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

4. At this point, connect the electrical wires as shown in (Fig.2), Make sure that all wire connections are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the circular strap using the Green Screw provided. (J).
5. Position the canopy (D) so that the mounting screws (A) protruding from mounting bracket line up with the holes in the canopy. Secure canopy in place with provided screw ball (E)

INSTALL LIGHT BULB (Fig. 1)

6. Install light bulb (F) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
7. Raise the fixture body (G) over the tube(N) to the ceiling and secure in place by tightening the screw (H)
8. Raise the fixture cap (I) to the bottom of the fixture and secure in place by tightening the finial (J)

FINISH THE INSTALLATION (Fig. 1)

9. Your installation is complete now. Return power to the junction box and test the fixture. **Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig.1


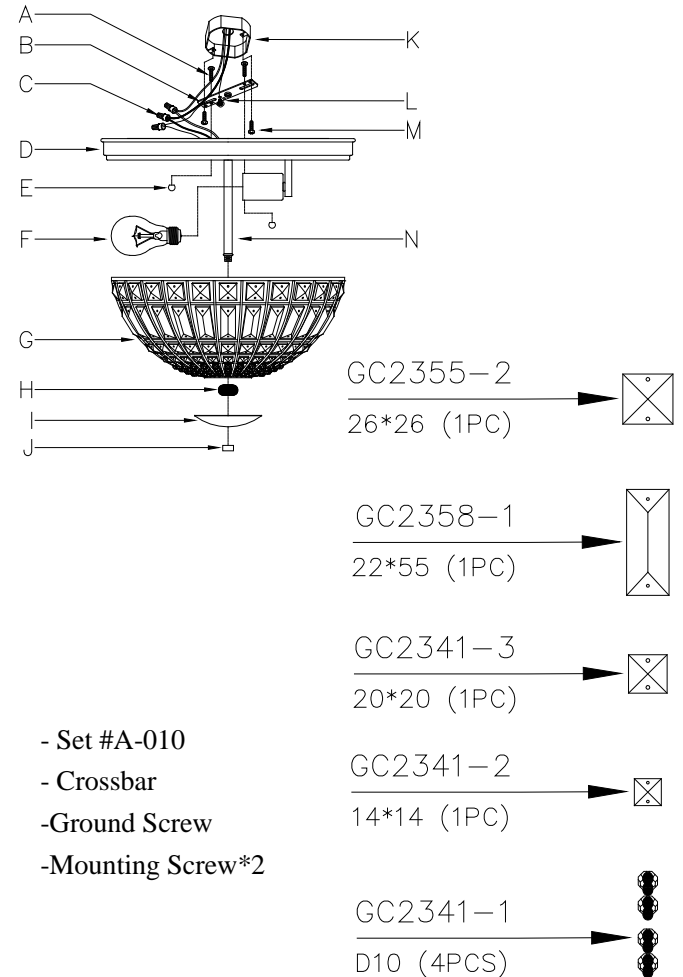


Fig. 2

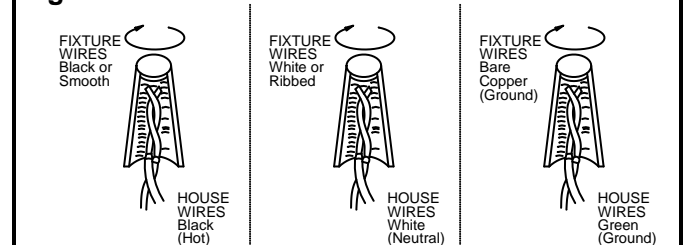

MIN 90°C SUPPLY CONDUCTORS