

INSTALLATION INSTRUCTIONS

Item#2376-77(New.09/12/2017)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
3. Secured the fixture loop (A) on to the nipple(B) tighten and then averaged the fixture body. After complete to this step, please keep you fixture wire smooth.
4. Adjust the arms to proper position.
5. The Crossbar (D) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your Junction box. Attach the Crossbar(D) to the Junction Box using the two junction box screw(C)(size: 8/32*25mm). Tighten the screws (C) securely with screwdriver. The side of crossbar marked "GND" must face out.
6. Use proper chain pliers to open one end link of chain and connect to the fixture loop. Then close the link.
7. By measuring, determine the correct number of links needed for the desired hanging height. Using the chain pliers, disconnect and discard the excess chain.
8. Carefully lace the fixture wires through the chain.
9. Slip the lock collar and canopy over the chain and allow them to rest on the fixture body.
10. Open the other end of the chain and attach it to the ceiling loop. Then close the chain.
11. Carefully feed the fixture wires through the ceiling loop and nipple and pull tight.

CONNECTING THE WIRES (Fig. 2)

12. At this point, connect the electrical wires as shown in (Fig.2), Make sure that all wire connections are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the circular strap using the Green Screw provided.
13. Raise the collar loop (H) and collar loop ring (I) to the canopy (G) and lock to the crossbar (D)

INSTALL LIGHT BULB (Fig. 1)

14. Install light bulb (D) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

FINISH THE INSTALLATION (Fig. 1)

15. Your installation is complete now. Return power to the junction box and test the fixture. **Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig.1


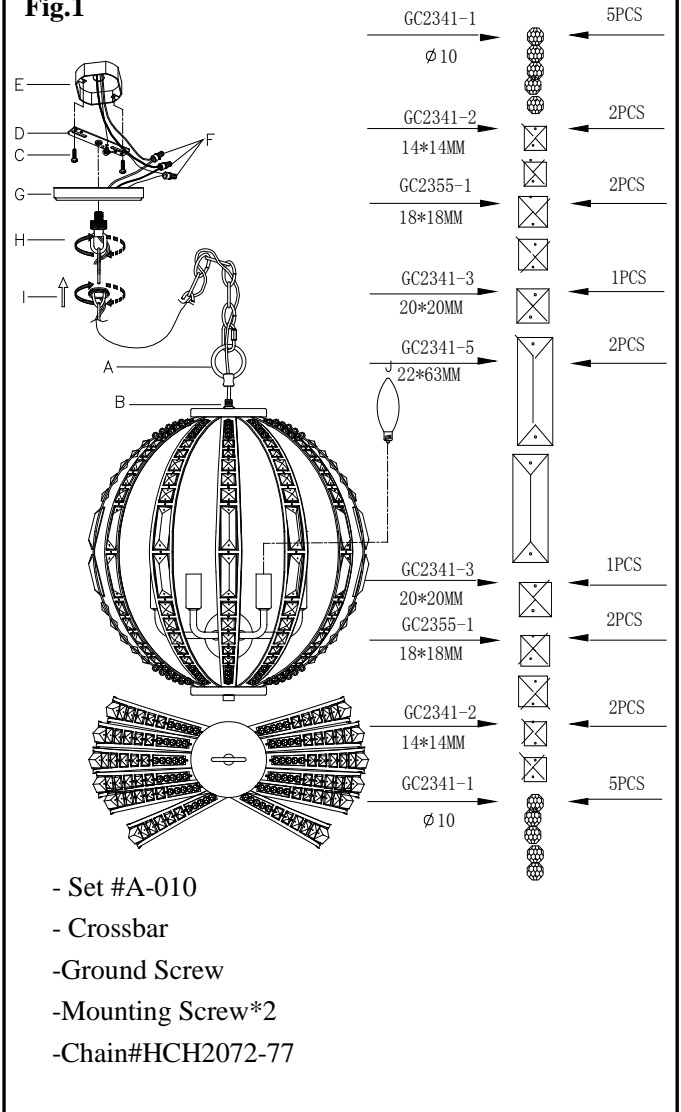


Fig. 2



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

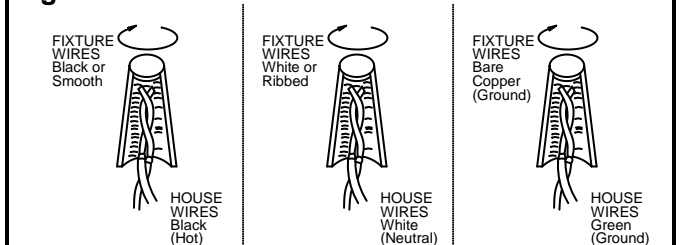