

# INSTALLATION INSTRUCTIONS

Item#2387-77(New.09/14/2017)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### HANGING THE FIXTURE (Fig. 1)

- Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
- Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
- Attach the circular strap (B) to the Junction Box(I) using the two mounting screws(K) (size:8/32\*25mm). Tighten the screws (K) securely with screwdriver. The side of circular strap marked "GND" must face out..
- Determine the desired hanging height and thread rods (F3) to the nipple of the fixture body (G), Then attach loop(L3) by screwing in to rod(F1). Note: remove the nipple if installing with one 6' rod only.
- Attach the quick link (L2) to loop (L3) and loop (L1) on the canopy (D), carefully feed the wire over loop (L3), quick link (L2) and loop (L1).
- The support cable is provided to support the weight of the fixture while wiring. Align the fixture to circular strap (B) and attach hook (M) on the end of support cable into a slot located on circular strap (B). Carefully allow the support cable to support the weight of the fixture while wiring.

### CONNECTING THE WIRES (Fig. 2)


- At this point, connect the electrical wires as shown in (Fig.2), Make sure that all wire connections are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the circular strap using the Green Screw.
- Position the canopy (D) so that the mounting screws protruding from mounting bracket line up with the holes in the canopy. Secure canopy in place with provided mounting screws balls (E)

### INSTALL LIGHT BULB (Fig. 1)

- Install light bulb (H) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

### FINISH THE INSTALLATION (Fig. 1)

- Your installation is complete now. Return power to the junction box and test the fixture. **Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

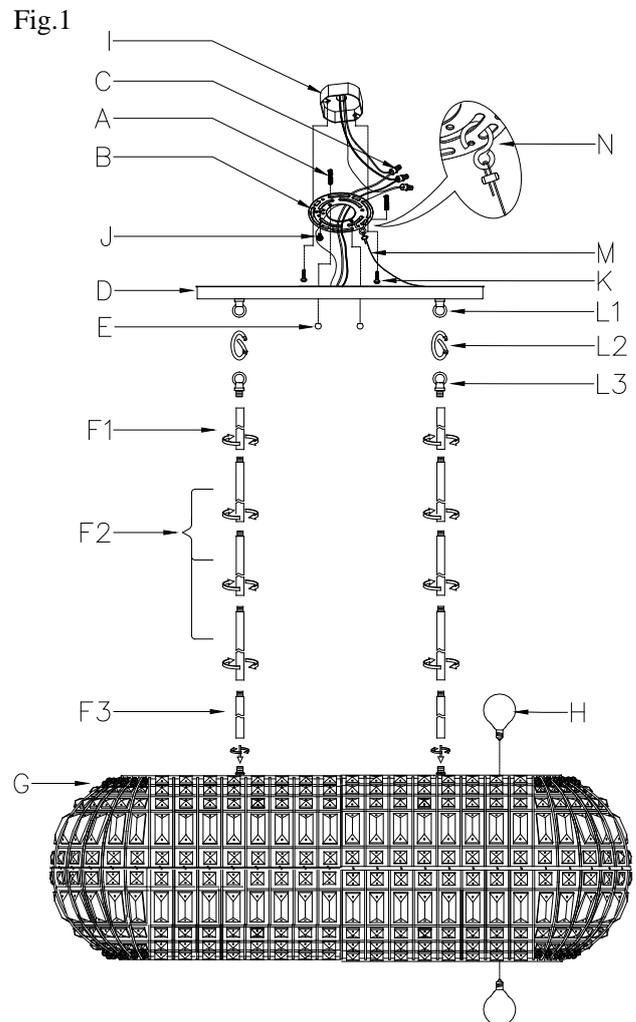

-A-020-102

- Circular strap


-Ground Screw

-Mounting Screw\*2

Rod#W30-H-077\*2 (F1)

W30-1-077\*6 (F2)

**Fig. 2**

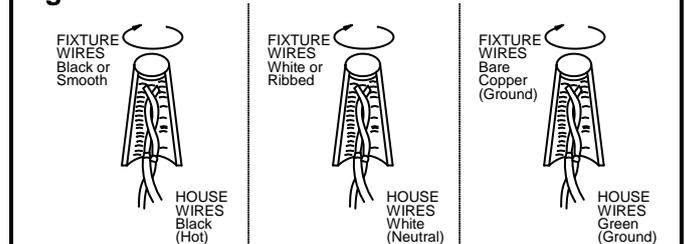

Crystal#

Side

GC2341-1  
D10 (2PCS) → 

GC2341-2  
14\*14 (1PC) → 

GC2341-3  
20\*20 (1PC) → 

GC2358-1  
22\*55 (1PC) → 

GC2341-3  
20\*20 (1PC) → 

-----  
 ← GC2341-3  
20\*20 (1PC)

 ← GC2358-1  
22\*55 (1PC)

 ← GC2341-3  
20\*20 (1PC)

 ← GC2341-2  
14\*14 (1PC)

 ← GC2341-1  
D10 (2PCS)

Front

GC2341-3  
20\*20 (4PCS) → 



GC2358-1  
22\*55 (1PC) → 

