

# INSTALLATION INSTRUCTIONS

Item# 3040-560

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Determine the desired hanging height and thread rods (F1, F2) to the all thread (I) on the fixture body. Screw loop (H1) on to rod (F1). Pass the wires carefully through each rod as you assemble.
4. Attach quick link (G) to loop (H1) and loop (H2) on the canopy (D). Carefully feed the wire through loop (H1), quick link (G), and loop (H2).
5. Thread screws (A) into the pre-drilled holes on circular strap (B) spaced the same distance apart as the holes in the canopy (D).
6. Attach circular strap (B) to the junction box (not included) using mounting screws (C) (Size: #8-32N\*L0.6"). The side of the circular strap marked "GND" must face out.

### CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap (B) using the green screw provided.
8. Tuck wire connectors neatly into the ceiling junction box and raise the canopy (D) to the ceiling.

### COMPLETING THE INSTALLATION (Fig. 1)

9. Slide canopy (D) over screws (A) and secure with nuts (E).
10. Place the glass shade (L) followed by large metal ring (M) and small metal ring (N) over the socket (K), secure with screw shell (O) by using the tool (P) (provided).
11. Install (1) one medium base bulb (Q) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

Set# A-020

-Circular Strap

-Ground Screw

-Mounting Screw\*2


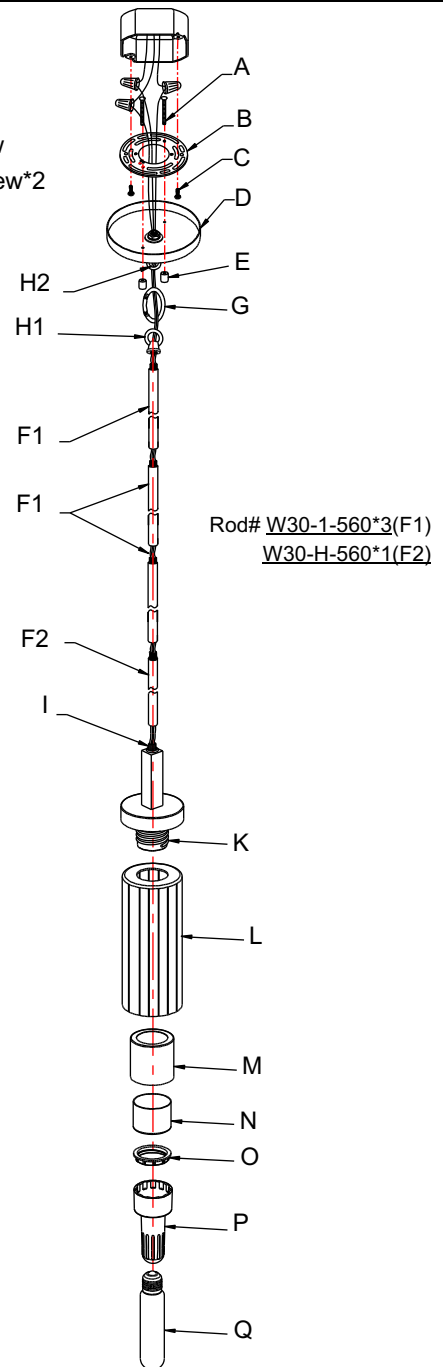


Fig.2

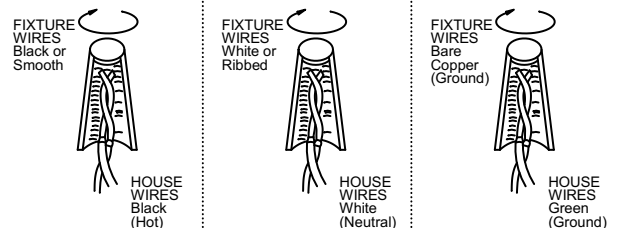

american  
lighting  
association