

INSTALLATION INSTRUCTION FOR FIXTURE #3096-77

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from ceiling. Including the mounting hardware.
2. Carefully remove new fixture from carton and check that all parts are included as shown in the illustration.
3. Determine the desired hanging height and thread rods (E and F) to coupling (D). Then thread loop (S) onto rod (F). Pass wires carefully through each rod as you assemble. Attach quick link (G) to loop (S) and loop (P) on canopy (I). Carefully feed wire through loop (S), quick link (G) and loop (P).
4. Thread mounting screws (L) into pre-drilled holes in circular strap (M) spaced same distance apart as holes in canopy (I). The length of mounting screws (L) may be adjusted if necessary.
5. Attach circular strap (M) to outlet box (Not included) using outlet box screws (K). The side of circular strap marked "GND" must face out.

CONNECTING THE WIRES (FIG. 2)



6. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to circular strap using green screw provided.
7. Tuck wire connections neatly into outlet box.

COMPLETING THE INSTALLATION (Fig. 1)

8. Attach fixture canopy (I) over circular strap (M) by protruding mounting screws (L) through mounting holes on canopy (I) and securing with finials (H) tightly.
9. Install (6) six candelabra base bulbs (C) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. —**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
10. Making sure glass notch (R) and screws (B) are at the same direction and then use tool (Q) (included) to secure crystal rod (O) and (N) into arm (A).
11. Assemble arms (A) onto fixture body and secure with screws (B) using tool (Q) as shown in Fig.1.

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

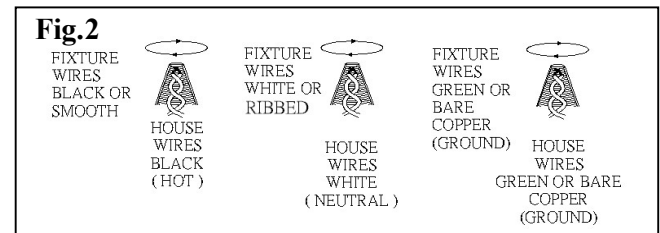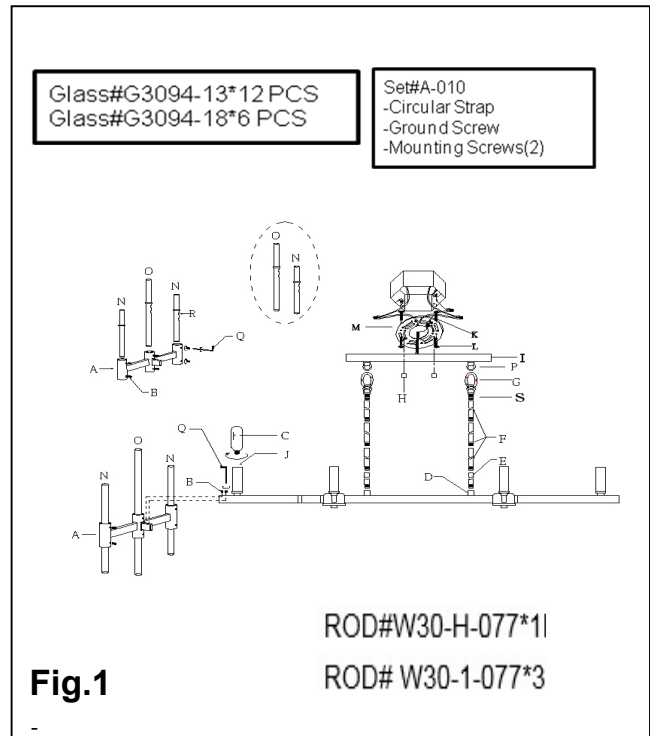

american
lighting
association

