

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## ASSEMBLING THE FIXTURE (FIG. 2)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Thread the stem (H) into the coupling (S) until snug, then hold the middle frame (F) and allow the center hole to align with the hole of the coupling (G) and secure by threading the stem (D) into the coupling (G) until snug.
4. Place the top frame (B) over the stem (D) and secure with nut (R).
5. Thread the fixture loop (A) snug onto the stem (D) protruding through top frame (B).
6. Place the candle sleeve (I) and glass dish (J) over the socket (L).
7. Then install the light bulbs in accordance with fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
8. Hang the crystal drop (K), (Q) and (O) onto the fixture body as shown in Figure 2.
9. Hang the crystal Chain(C), (P) and (N) onto the fixture body as shown in Figure 2.

## MOUNTING THE FIXTURE (FIG. 1)


1. Thread the nipple (S) into the collar loop (T) until snug.
2. Thread the other end of nipple (S) into the cross bar (P).
3. Place lock washer (Q) and hex nut (R) over the end of nipple (S) protruding through cross bar (P) then thread hex nut (R) to nipple (S) until tight.
4. Take this crossbar assembly and mount to ceiling outlet box (V) using outlet box screw (W). The side of cross bar marked "GND" must face out.
5. Use proper chain pliers to open one end link of the chain and connect to the fixture loop (A). Then close the link.
6. By measuring, determine the correct number of links needed for proper hanging height. Using the chain pliers, disconnect and discard the remaining chain.
7. Carefully lace the fixture wires through the chain (X).
8. Slip collar ring (Y) over the chain (X), then do the same with canopy (U).
9. Open the other end link of the chain (X) and connect to the collar loop (T). Then close the link.
10. Feed the fixture wires through the collar loop (T) and nipple (S) and pull until tight.

## CONNECTING THE WIRES (See FIG. 3)



1. At this point, connect the electrical wire as shown in the wiring diagram, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided.
2. Tuck these wires connectors neatly into the ceiling outlet box and raise the collar ring (Y) and thread onto collar loop (T) protruding through canopy.

Your installation is now complete. Return power to the outlet box and test the fixture.

**Fig. 2**

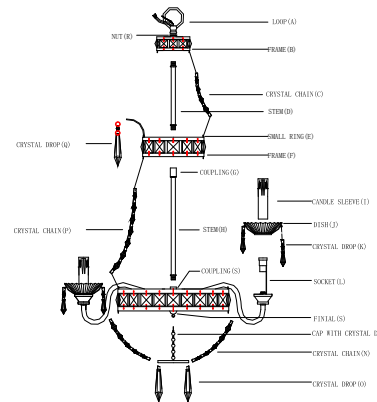

**Fig. 1**

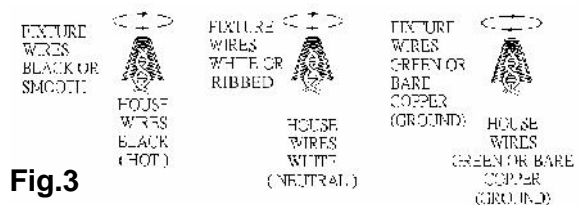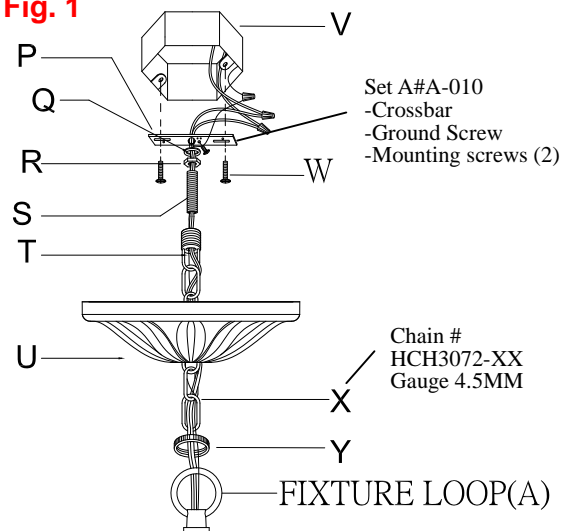

**Fig.3**