

INSTALLATION INSTRUCTIONS

For Wall Mount Fixture 350

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER BEFORE INSTALLATION
AVERTISSEMENT ! COUPER LE COURANT AUNIVEAU DES FUSIBLES OU DU DISJONCTEUR

HANGING THE FIXTURE

1. Shut off the power at the circuit breaker box (avertissement! couper le courant au niveau des fusibles ou du disjoncteur) and remove the old fixture, including the mounting hardware..
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to misplace any small parts necessary for installation.
3. Thread hex nut (C) onto all thread (E). Insert the lock washer(B) and thread the all thread (E) into the crossbar(A) with hex nut (C). The length of all thread (E) into crossbar (A) may be adjusted if necessary.
4. Take this crossbar assembly (A) and mount it to outlet box (Not provided) with mounting screws (D) (Size: #8-32N*L0.6"). The side of crossbar marked with "GND" must face out
5. At this point, connect the electrical wires as shown in (Figure.2). Making sure all wire connections are secure. If your outlet box has a ground wire (green or bare copper), connect the Ground Wire from the fixture to this wire. If not, connect the fixture Ground Wire directly to the Crossbar (A) with the Green Screw provided. After wires are connected, tuck them carefully inside the outlet box.
6. Finish mounting the fixture by aligning it over the Nipple (E) so it goes through the hole in the backplate of the fixture (F). Tighten with Plastic gasket (I), Metal gasket (H) and knurled Cap Nut (G) onto the Nipple (E) to lock the Fixture against the wall. (Do not over tighten) (Fig.1)
7. Install (1) one medium base bulb up to 100 watts each or CFL or LED equivalent (not included) in accordance with fixture specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE! (NE PAS DEPASSER LA PUISSNCE NOMINALE MAXIMLE!)**
Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig.1

Set# A-010

- Crossbar
- Ground screw
- Mounting Screw*2

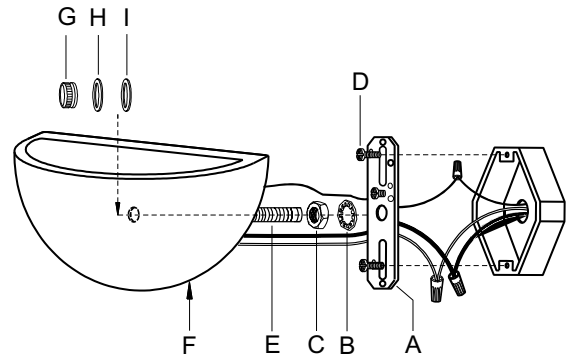








Fig .2

 FIXTURE WIRES Black or Smooth	 FIXTURE WIRES WHITE OR RIBBED	 FIXTURE WIRES Green or Bare Copper (Ground)
 HOUSE WIRES Black (Hot)	 HOUSE WIRES White (Neutral)	 HOUSE WIRES Green or Bare Copper (Ground)

MIN 90°C SUPPLY CONDUCTORS

