

INSTALLATION INSTRUCTIONS

Item# 3717-788

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. When assembling the main body, there will be one set of parts that have the supply wire laced through.
4. These parts must be slipped along the wire and assembled according to the following instructions.
5. First slip stem (1) along wire and thread into threaded pipe (2) located on the top of the cross bar (3).
6. Do the same to the other stem by threading in the stem to threaded pipe located at the top of body frame (3). Make sure loops (I) are parallel to fixture body.

HANGING THE FIXTURE (Fig. 2)

7. Take the chain, determine the length you require to hang fixture. Please note: the fixture is supplied with 4x quick links and must be attached to both end of the chain.
8. Attach one end of the set of chain to fixture loop (I) and the other end to loop (E) on canopy (D).
9. Feed fixture wires through chain to the canopy.
10. After wire have been feed through the chain, slip end through center hole of loop (E) in canopy.
11. Fixture is ready to install.
12. Fasten the circular strap (A) to junction box (JB) 'not provided' with junction box screws (B).
13. The support cable is provided to support the weight of the fixture while wiring. Attach hook (J) on the end of support cable to circular strap (A). Carefully allow support cable to support weight of fixture while wiring.

CONNECTING THE WIRE (Fig. 3)

14. In this step, you may need an assistance for wiring connection as the fixture is slightly heavy.
15. Make an electrical wire connection as shown in Fig.3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise connect fixture ground wire directly to circular strap (A).
16. After done wiring connection, secure the fixture by thread the 2x cap nuts (F) and tighten.

FINISHING THE FIXTURE (Fig. 1)

17. Install 10x E12 base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification

DONOT EXCEED THEMAXIMUM WATTAGE RATING!

(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

FIG. 1

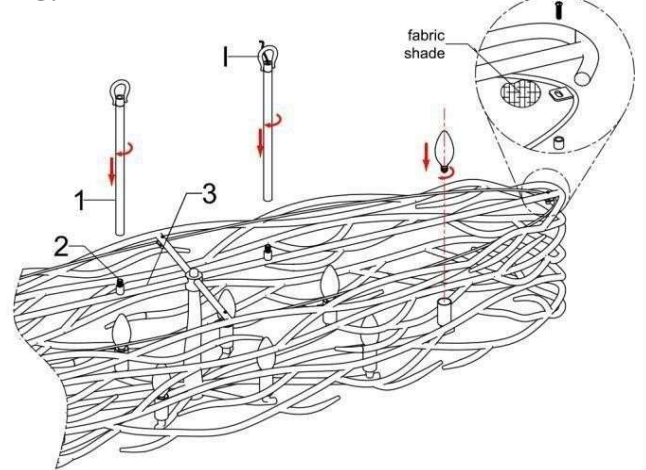


FIG. 2



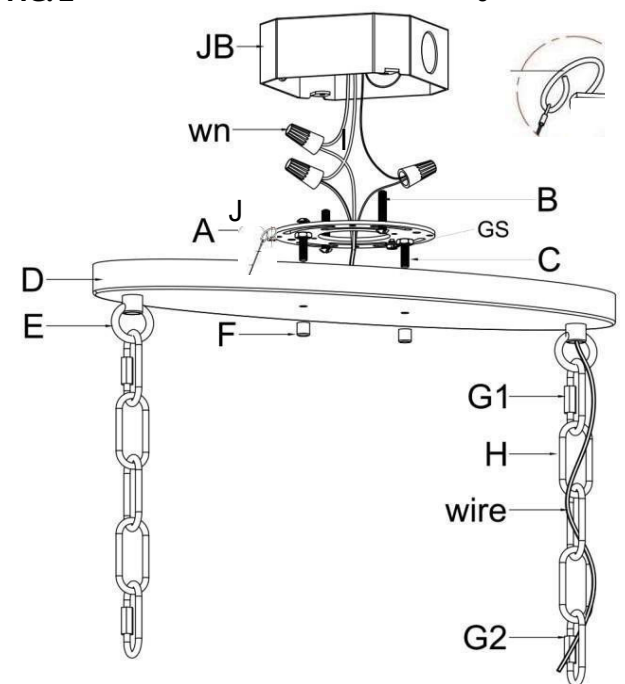


Fig. 3



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



american
lighting
association