

INSTALLATION INSTRUCTION FOR FIXTURE 3724-PL

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE

1. Shut off the power supply at the fuse box or circuit breaker box (avertissement! couper le courant au niveau des fusibles ou du disjoncteur). Remove the old fixture from wall. Including the old cross bar.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to lose any small parts necessary for installation.
3. Take the mounting plate (A) over the outlet box and adjust it to the proper position, then make the marks on the wall for the 4 key holes' position.
4. Drill the holes at the position where marked at the step 3, and install the plastic anchors (C) onto them well;
5. Attach the mounting plate (A) onto the outlet box using 4 wood screws (D) thread into the plastic anchors (C) and let the wood screws (D) set at the long slot of the key hole well, then secure the outlet box screw (K) through the mounting holes of the mounting plate (A) and the outlet box tightly. The side of the mounting plate marked "GND" must face out.
6. Follow the wiring instructions carefully (See Fig.2).
7. Attach the fixture back plate (B) over the mounting plate (A) using 4 steel screws (F) what are locked by the screw tool (E) tightly;
8. Put the glass shade (I) over the socket (J) and secure it with ring (H) and socket ring (G).
9. Install the light bulb in accordance with fixture's specifications. **DO NOT EXCEED THE MAXMUM WATTAGE RATING(ne pas dépasser la puissance nominale maximale)!**
10. This fixture is rated for a minimum start temperature of -17° Celsius.
11. The ballast and lamp are combined, to replace or install, twist pins into socket as shown on Fig.3.

Your installation is now complete. Return power to the junction box and test the fixture.

Wiring (See fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black (HOT) house wire. Connect the white wire from the fixture to the white (Neutral) house wire. Make sure all the wire nuts were secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (Green or Bare Copper) connect fixture's ground wire to it. Other wise attach the bare copper fixture wire to the green ground screw on the mounting plate.
2. Tuck the wire connections neatly into the wall junction box.

Fig.2



Fig.3





Fig. 1

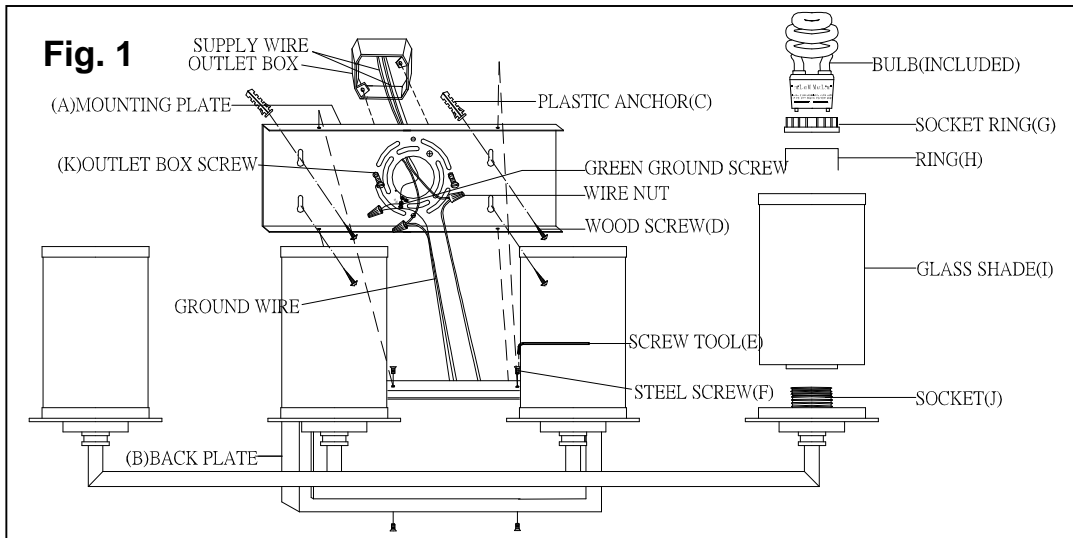

american
lighting
association

Contains Mercury (Hg) Dispose of according to Local, State and Federal Law. (www.epa.gov/bulbrecycling)