

INSTALLATION INSTRUCTION FOR FIXTURE #4065-572

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from wall. Including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Determine the rod length if necessary, then lace the fixture wires through the rods (K) & (I), small loop (D) and canopy (F) in order. After that, assemble the rods (I) & (K) together, then assemble the small loop (D) onto the top end of rod (I), after that, assemble the bottom end of the rod (K) into the coupling (J) tightly.
4. Connect both small loops (D) together using the hook (H).
5. Attach the mounting bar (C) to the outlet box using the outlet box screws (B). The side of the mounting plate marked "GND" must face out.
6. Follow the wiring instructions carefully (See Fig.2).
7. Attach the fixture canopy (F) over the mounting bar (C) by protruding the nipple (A) through the mounting holes on the canopy (F) and securing with ball nut (G) tightly.
8. Install the bulb (L) (included) onto the socket (E) in accordance with fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

CONNECTING THE WIRES (FIG. 2)

1. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting strap using the green screw provided.
2. Tuck the wire connections neatly into the wall outlet box.

Your installation is now complete. Return power to the junction box and test the fixture.

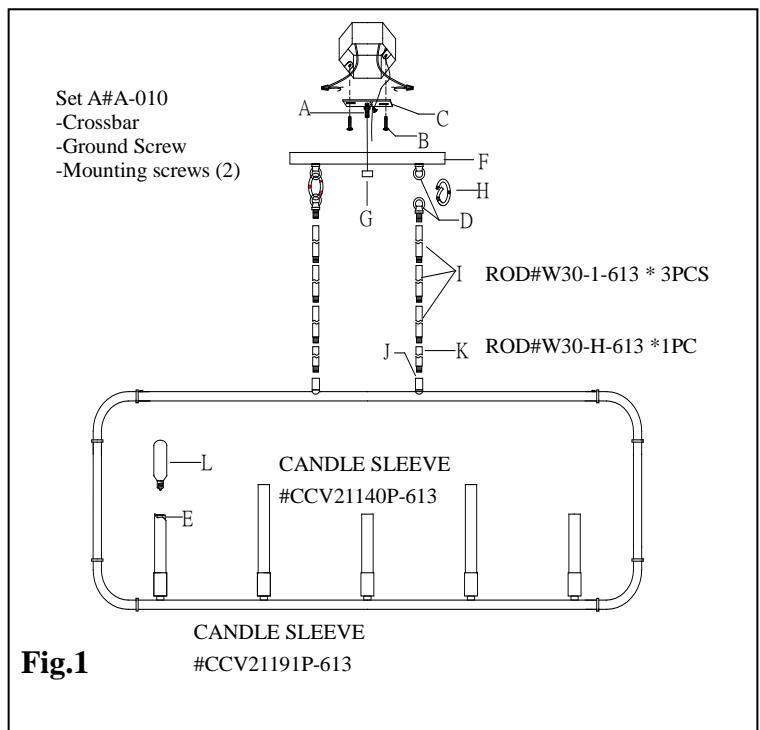


Fig.2

